



V

VSTE

ARCHITECTURAL HARDWARE 2025

Design

研发中心
意大利·那波里(NAPOLI)研发中心

Research and development center
Research and Development Center NAPOLI, Italy

运营中心
深圳威思特门控科技有限公司
地址：深圳市福田区滨河大道5022号
电话：0577-3636 0396

Operation center
Shenzhen west gate control technology Co., LTD
Add: No. 5022 Binhe Avenue, Futian District, Shenzhen
Tel :0577-3636 0396

制造中心
浙江安毅建筑五金有限公司
地址：温州龙湾区空港新区港强路33号
电话：0577-8615 2218

Manufacturing center
Zhejiang Anyi construction hardware Co., LTD
Add: No. 33 Gangqiang Road, Airport New District, Longwan District, Wenzhou
Tel :0577-8615 2218

客户服务热线：
400-138-8778

Customer Service Hotline:
The 400-138-8778

www.anyihardware.com



FROM IN ITALY



Inheriting Italian Classics

Wistar, a brand with Italian blood, carries the unique pursuit of classic and innovation since its birth. Italy, a land full of romance and art, has nurtured countless masters of design and craftsmanship. Italy, a land full of romance and art, has nurtured countless masters of design and craftsmanship, and Westech is one of them.

Quality builds the future and widens the range of products

Ltd. in 2010, and set up Shenzhen Wisdom Door Control Technology Company in Shenzhen. We have introduced modern management system and imported equipment, set up a strong R & D, production and sales team to ensure that each product is perfect. We have introduced modern management system and imported equipment, set up a strong R & D, production and sales team to ensure that each product is perfect. For a long time we have been focusing on interior door locks, intelligent door locks, home hardware, engineering hardware and other high-end customised products. hardware, engineering hardware and other high-end custom products. We insist on the ultimate pursuit of quality, continuous innovation, to provide customers with We are committed to the pursuit of quality and innovation to provide our customers with an experience of home hardware that exceeds their expectations.

Online and offline for the world

While focusing on R&D and production, we have a strong sales team, which not only includes global trade, industrial engineering, famous real estate and other channels, but also has a strong sales network in China. We have a strong sales team, which not only includes global trade, industrial engineering, famous real estate and other channels, but also set up sales outlets across the country to provide customers with convenient and professional services. In addition to offline sales, our e-commerce section also brings unlimited empowerment to our customers, achieving the first single product sales on Tmall.

Looking to the future

VSTE will continue to pursue the ultimate innovation and quality with the spirit of unremitting struggle. We are committed to providing thousands of households with beautiful, comfortable and convenient home hardware experience, so that every customer can feel the VSTE quality of life.





9041-8004

Intelligent door lock series

Product parameter

Material: Zinc
Suitable to: Wooden door, Exterior door
Function: Fingerprint, Key
Fingerprint capacity: 50 sets



亚黑/HC




亚黑/HC



Opposite Side

Product dimensions

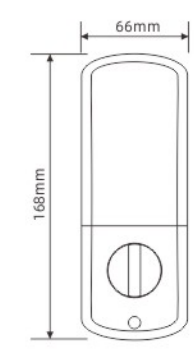



5011-8002

Intelligent door lock series


Product parameter

Material: Zinc
Reference center distance: 60-70mm
Suitable to: Wooden door, Exterior door
Function: Fingerprint, Password, IC Card, Key, Bluetooth APP, WiFi built in
Fingerprint capacity: 99 sets
Password capacity: 99 sets
Performance technical index: Using biological fingerprint technology which is sensitive.
Card type: IC ml
Quiescent dissipation: $\leq 20\mu A$
Low battery indicator: 4.8V
Operating temperature: $-20^{\circ}C \sim 60^{\circ}C$
Dynamic power consumption: About 150mA
Supply voltage: 6V
Power supply: 4 pcs AA alkaline battery



黑镍/BN

Product dimensions



黑镍/BN



亚黑/HC



镍拉丝/N



8011

Intelligent door lock series


Product parameter

- Material: Zinc
- Reference center distance: 60-70mm
- Suitable to: Wooden door, Exterior door
- Function: Fingerprint, Password, IC Card, Key, Bluetooth APP
- Fingerprint capacity: 99 sets
- Password capacity: 99 sets
- Performance technical index: Using biological fingerprint technology which is sensitive.
- Card type: IC ml
- Quiescent dissipation: $\leq 20\mu A$
- Low battery indicator: 4.8V
- Operating temperature: $-20^{\circ}C \sim 60^{\circ}C$
- Dynamic power consumption: About 150mA
- Supply voltage: 6V
- Power supply: 4 pcs AAA alkaline battery



镍拉丝/N

Product dimensions

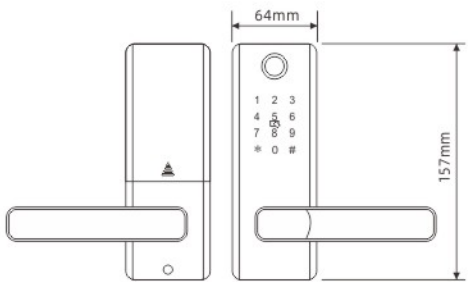

黑镍/BN

亚黑/HC



镍拉丝/N

Opposite Side



8031

Intelligent door lock series


Product parameter

Material: Zinc
 Reference center distance: 60-70mm
 Suitable to: Wooden door, Exterior door
 Function: Fingerprint, Password, IC Card, Key, Bluetooth APP
 Fingerprint capacity: 99 sets
 Password capacity: 99 sets
 Performance technical index: Using biological fingerprint technology which is sensitive.
 Card type: IC ml
 Quiescent dissipation: $\leq 20\mu A$
 Low battery indicator: 4.8V
 Operating temperature: $-20^{\circ}C \sim 60^{\circ}C$
 Dynamic power consumption: About 150mA
 Supply voltage: 6V
 Power supply: 4 pcs AAA alkaline battery



黑镍/BN

Product dimensions

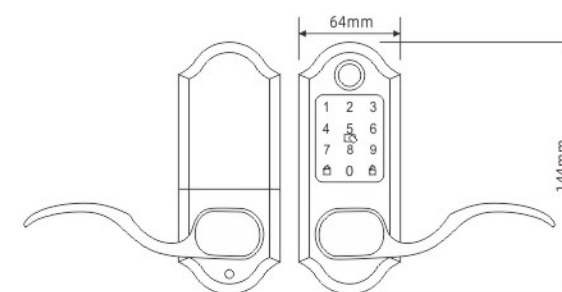

红拉丝/ORB



镍拉丝/N



镍拉丝/N

8051

Intelligent door lock series

Product parameter

Material: Aluminum
 Reference center distance: 60-70mm
 Suitable to: Wooden door, Exterior door
 Function: Fingerprint, Password, IC Card, Key, Bluetooth APP
 Fingerprint capacity: 100 sets
 Password capacity: 150 sets
 Performance technical index: Using biological fingerprint technology which is sensitive.
 Card type: IC ml
 Quiescent dissipation: $\leq 20\mu A$
 Low battery indicator: 4.8V
 Operating temperature: $-20^{\circ}C \sim 60^{\circ}C$
 Dynamic power consumption: About 150mA
 Supply voltage: 6V
 Power supply: 4 pcs AAA alkaline battery



Opposite Side



7061

Intelligent wooden door lock series


Product parameter

Material: Zinc
 Suitable to: Wooden door
 Function: Fingerprint, Password, Key
 Fingerprint capacity: 20 sets
 Password capacity: 20 sets



亚黑/HC

Product dimensions

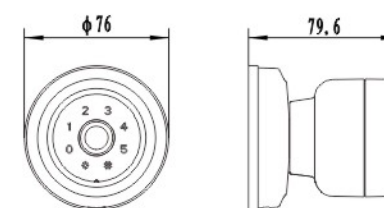

红古铜/BAC



镍拉丝/N



8002-2021 Intelligent door lock series

Product parameter

Material: Zinc
 Reference center distance: 60-70mm
 Suitable to: Wooden door, Exterior door
 Function: Fingerprint, Password, IC Card, Key,
 Bluetooth APP, WiFi built in
 Fingerprint capacity: 99 sets
 Password capacity: 99 sets
 Performance technical index: Using biological fingerprint
 technology which is sensitive.
 Card type: IC ml
 Quiescent dissipation: $\leq 20\mu A$
 Low battery indicator: 4.8V
 Operating temperature: $-20^{\circ}C \sim 60^{\circ}C$
 Dynamic power consumption: About 150mA
 Supply voltage: 6V
 Power supply: 4 pcs AA alkaline battery



8002 Mechanical door lock series

Product parameter


Material: Zinc
 Reference center distance: 60-70mm
 Suitable to: Wooden door, Exterior door



8003-2031
Intelligent door lock series

Product parameter

Material:Zinc
Reference center distance:60-70mm
Suitable to:Wooden door,Exterior door
Function:Fingerprint,Password,IC Card,Key,
Bluetooth APP, WiFi built in
Fingerprint capacity:99 sets
Password capacity:99 sets
Performance technical index:Using biological fingerprint
technologywhich is sensitive.
Card type:IC ml
Quiescent dissipation:≤20μA
Low battery indicator:4.8V
Operating temperature:-20℃~60℃
Dynamic power consumption:About 150mA
Supply voltage:6V
Power supply:4 pcs AA alkaline battery

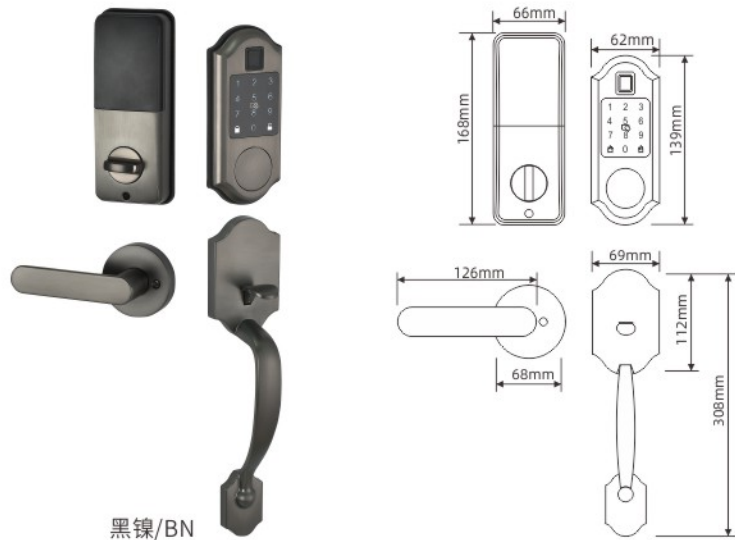


黑镍/BN

8004-2071
Intelligent door lock series

Product parameter

Material:Zinc
Reference center distance:60-70mm
Suitable to:Wooden door,Exterior door
Function:Fingerprint,Password,IC Card,Key,
Bluetooth APP, WiFi built in
Fingerprint capacity:99 sets
Password capacity:99 sets
Performance technical index:Using biological fingerprint
technologywhich is sensitive.
Card type:IC ml
Quiescent dissipation:≤20μA
Low battery indicator:4.8V
Operating temperature:-20℃~60℃
Dynamic power consumption:About 150mA
Supply voltage:6V
Power supply:4 pcs AA alkaline battery

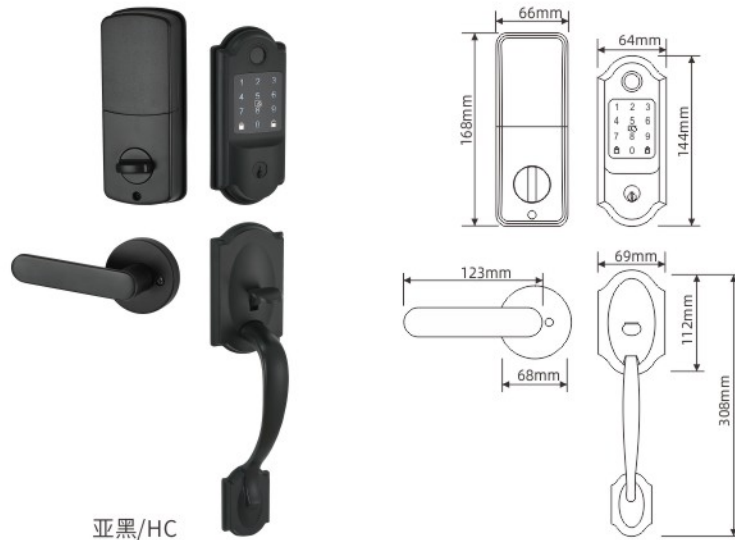

亚黑/HC

8003
Mechanical door lock series

Product parameter

Material:Zinc
Reference center distance:60-70mm
Suitable to:Wooden door,Exterior door



镍拉丝/N

红拉丝/ORB

镍拉丝/N

玫瑰金/SA

8004
Mechanical door lock series

Product parameter


Material:Zinc
Reference center distance:60-70mm
Suitable to:Wooden door,Exterior door



红拉丝/ORB


鎏金/PVD

亚黑/HC

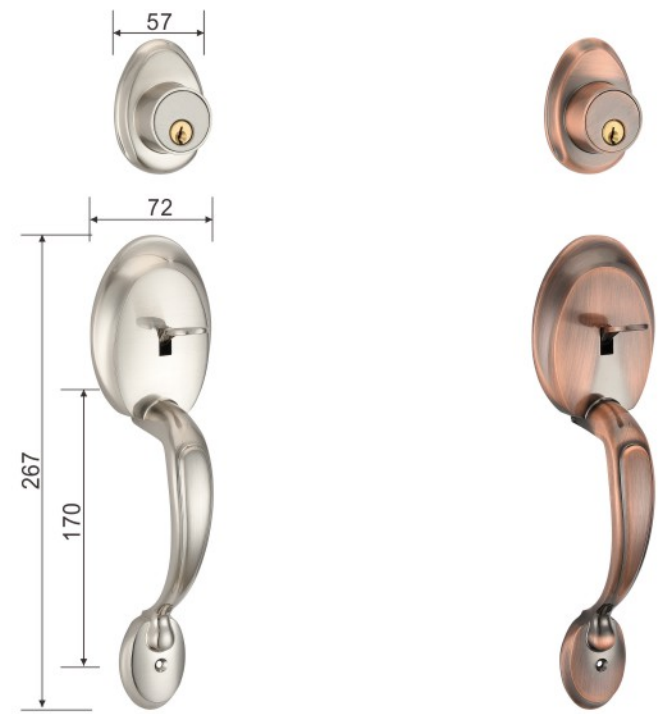


8051 镍拉丝/N

8051 红古铜/BAC

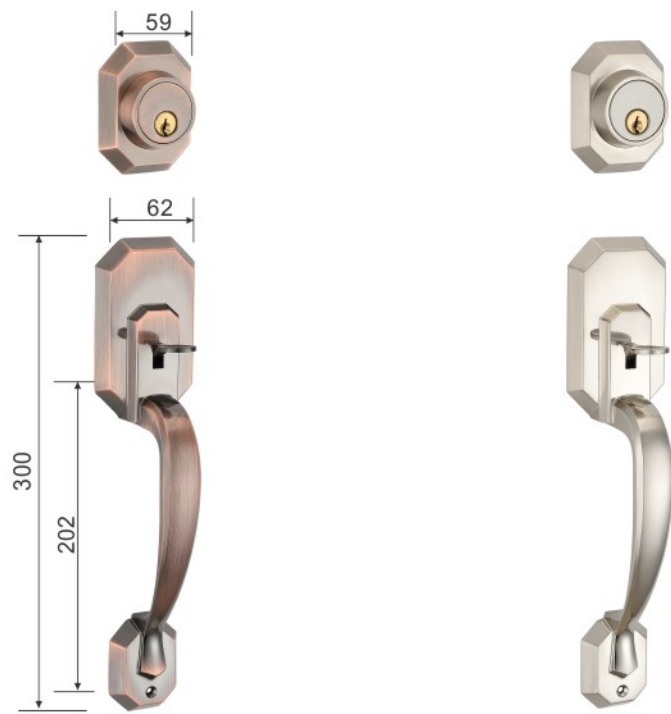

8071 红古铜/BAC


8071 镍拉丝/N

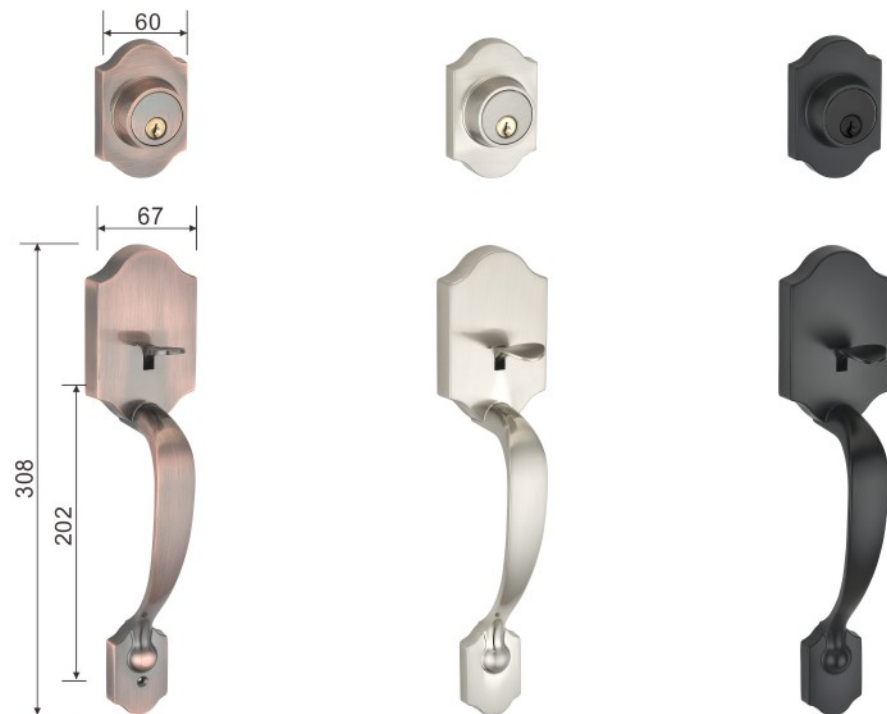

8001 红古铜/BAC


8001 镍拉丝/N

8001 亚黑/HC

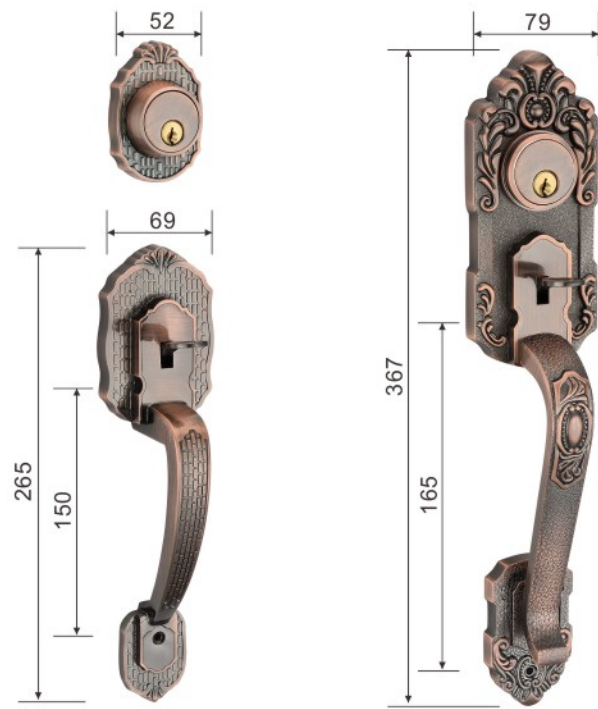

8061 红古铜/BAC

8081 红古铜/BAC

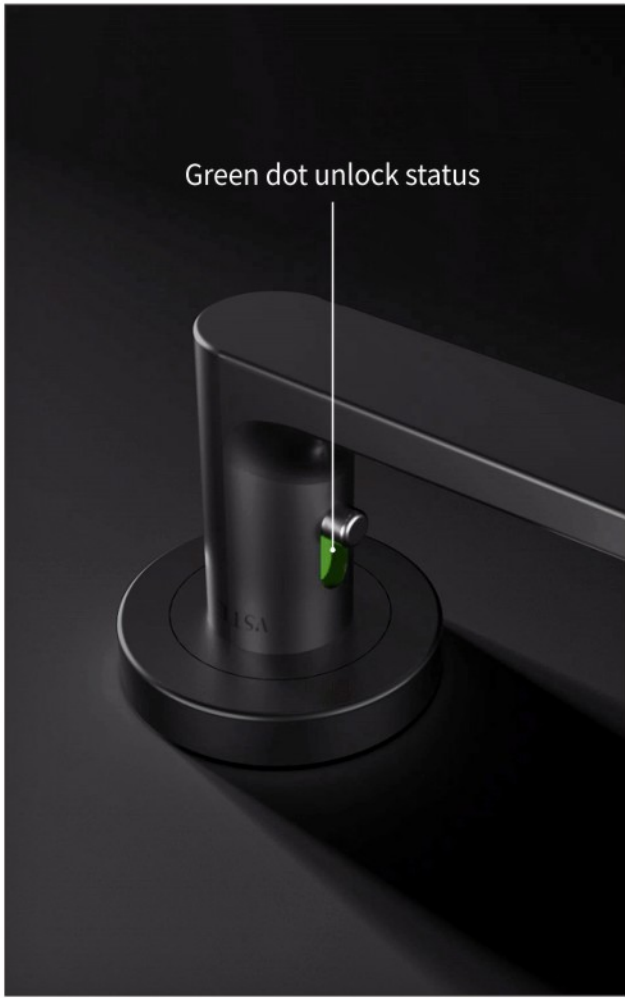

Green dot unlock status



Red dot locked state

Space for myself. Time for myself. Me time.
Whether soothing relaxation in the bathroom, a refreshing power nap
in the bedroom, focussed work in the home office or undisturbed
chilling in the teenager room: by VSTE gives more me time.

Radically Reduced Design



黑镍+黑皮/BN

Available Finishes



黑镍+黑皮/BN



镍拉丝+白皮/N




亚黑+棕皮/HC



亚黑+黑皮/HC

M003-57

Material: Zinc alloy
Door Thickness: 38-50mm





镍拉丝+白皮/N

Available Finishes



亚黑+黑皮/HC




黑镍+黑皮/BN




黑镍+棕皮/BN

M003-58

Material: Zinc alloy
Door Thickness: 38-50mm



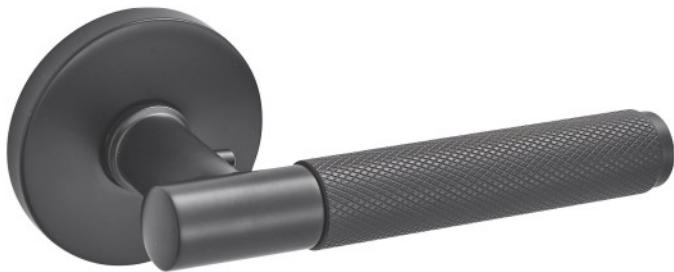

亚黑/HC

Available Finishes




黑镍/BN



镍拉丝/N

M003-59

Material: Zinc alloy
Door Thickness: 38-50mm



亚黑+木纹/HC

Available Finishes




镍拉丝+木纹/N



黑镍+木纹/BN

M003-60

Material: Zinc alloy
Door Thickness: 38-50mm





黑镍/BN

Available Finishes




镍拉丝/N



亚黑/HC

M003-02

Material: Zinc alloy
Door Thickness: 38-50mm





亚黑/HC

Available Finishes




黑镍/BN



镍拉丝/N

M006-201

Material: Zinc alloy
Door Thickness: 38-50mm



SS/不锈钢

Available Finishes




黑镍/BN



亚黑/HC

M003-01

Material: Stainless steels
Door Thickness: 38-50mm





H SERIES




鎏金/PVD

Available Finishes

H003-705

Material: Zinc alloy
Door Thickness: 38-50mm





鎏金/PVD


Available Finishes



亮铬/CP

H003-401

Material: Zinc alloy
Door Thickness: 38-50mm





鎏金/PVD

Available Finishes



亮铬/CP

H003-402

Material: Zinc alloy
Door Thickness: 38-50mm





拉丝铬/BC

Available Finishes



亚黑/HC




黑镍/BN



金拉丝/SB

H003-530

Material: Zinc alloy
Door Thickness: 38-50mm





It combines elements of design, art,
fashion and quality of life. Through the mutual fit between thematerials,
a smart and pleasant experience is constructed.



亮铬/CP

Available Finishes




黑镍/BN



拉丝铬/BC

H003-516

Material: Zinc alloy
Door Thickness: 38-50mm





亮铬+白皮/CP

Available Finishes



亚黑+黑皮/HC




黑镍+棕皮/BN



鎏金+爱马仕橙/PVD

H003-76

Material: Zinc alloy+leather
Door Thickness: 38-50mm





It combines elements of design,
art, fashion and quality of life.
Through the mutual fit between the materials,
a smart and pleasant experience is constructed.



金拉丝+爱马仕橙/SB

Available Finishes




亚黑+黑皮/HC



黑镍+棕皮/BN

H003-526

Material: Zinc alloy+leather
Door Thickness: 38-50mm





金拉丝/SB

Available Finishes




亚黑/HC



黑镍/BN

H003-298

Material: Zinc alloy
Door Thickness: 38-50mm





亮铬/CP

Available Finishes




黑镍/BN



金拉丝/SB

H003-277

Material: Zinc alloy
Door Thickness: 38-50mm





H SERIES



拉丝铬/BC

Available Finishes



黑镍/BN




玫瑰金/SA



金拉丝/SB


H003-285

Material: Zinc alloy
Door Thickness: 38-50mm





H SERIES

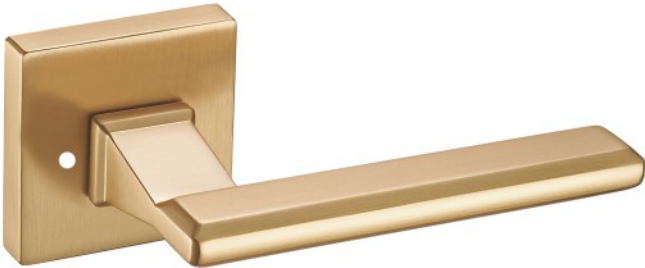

金拉丝/SB

Available Finishes




亚黑/HC



黑镍/BN

H006-535

Material: Zinc alloy
Door Thickness: 38-50mm





G SERIES



金拉丝/SB

Available Finishes



镍拉丝/N



亚黑/HC




黑镍/BN



亮光青古铜/AB

G007-201

Material: Zinc alloy
Door Thickness: 38-50mm





亮光青古铜/AB

Available Finishes



镍拉丝/N



亚黑/HC




黑镍/BN



金拉丝/SB

G003-402

Material: Zinc alloy
Door Thickness: 38-50mm



亚黑/HC

Available Finishes



亮光青古铜/AB



镍拉丝/N




金拉丝/SB



黑镍/BN


G003-401

Material: Zinc alloy
Door Thickness: 38-50mm





G SERIES

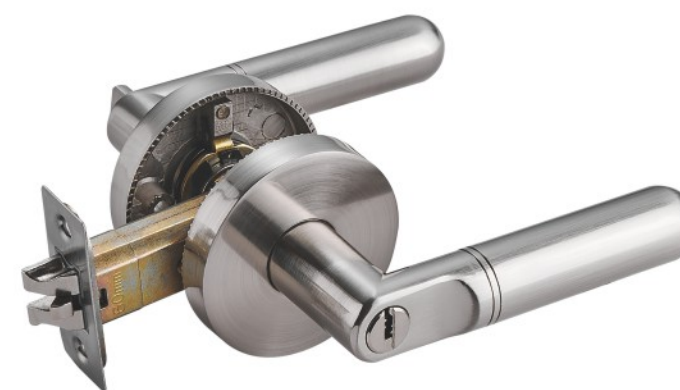

镍拉丝/N

Available Finishes



金拉丝/SB



亚黑/HC




黑镍/BN



红古铜/BAC

G003-403

Material: Zinc alloy
Door Thickness: 38-50mm





黑镍/BN

Available Finishes



金拉丝/SB



亚黑/HC



镍拉丝/N




红古铜/BAC



亮光青古铜/AB

G003-405

Material: Zinc alloy
Door Thickness: 38-50mm



亮光青古铜/AB

Available Finishes



镍拉丝/N



亚黑/HC




金拉丝/SB



黑镍/BN

G006-405


Material: Zinc alloy
Door Thickness: 38-50mm





8915 红古铜/BAC

Available Finishes

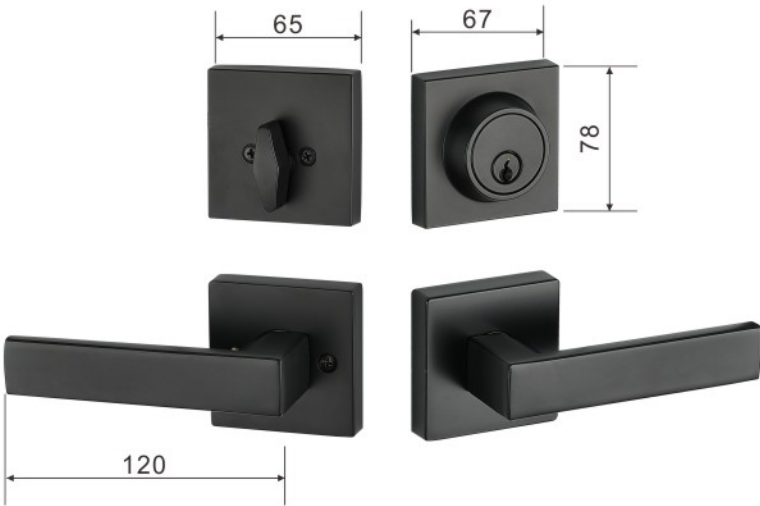

8715-106 亚黑/HC

Available Finishes




8915 亮光青古铜/AB

8915 亚黑/HC



8915 镍拉丝/N

8915 PS 镍拉丝/N



092168-108 镍拉丝/N



091018-106 镍拉丝/N

Material:Zinc
Reference center distance:60-70mm
Suitable to:Wooden door,Exterior door



亚黑/HC


Available Finishes



砂金/SG

E006-30

Material: Zinc alloy
Door Thickness: 38-50mm





亚黑/HC


Available Finishes




金拉丝/SB

E006-403

Material: Zinc alloy
Door Thickness: 38-50mm



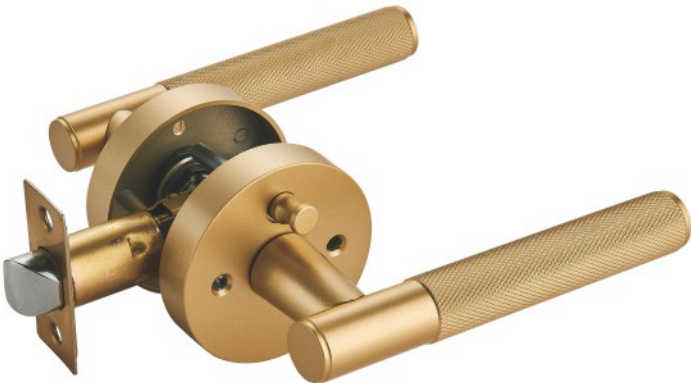

砂金/SG

Available Finishes




镍拉丝/N



亚黑/HC

E003-701

Material: Zinc alloy
Door Thickness: 38-50mm





亚黑/HC


Available Finishes




砂金/SG


E006-702

Material: Zinc alloy
Door Thickness: 38-50mm



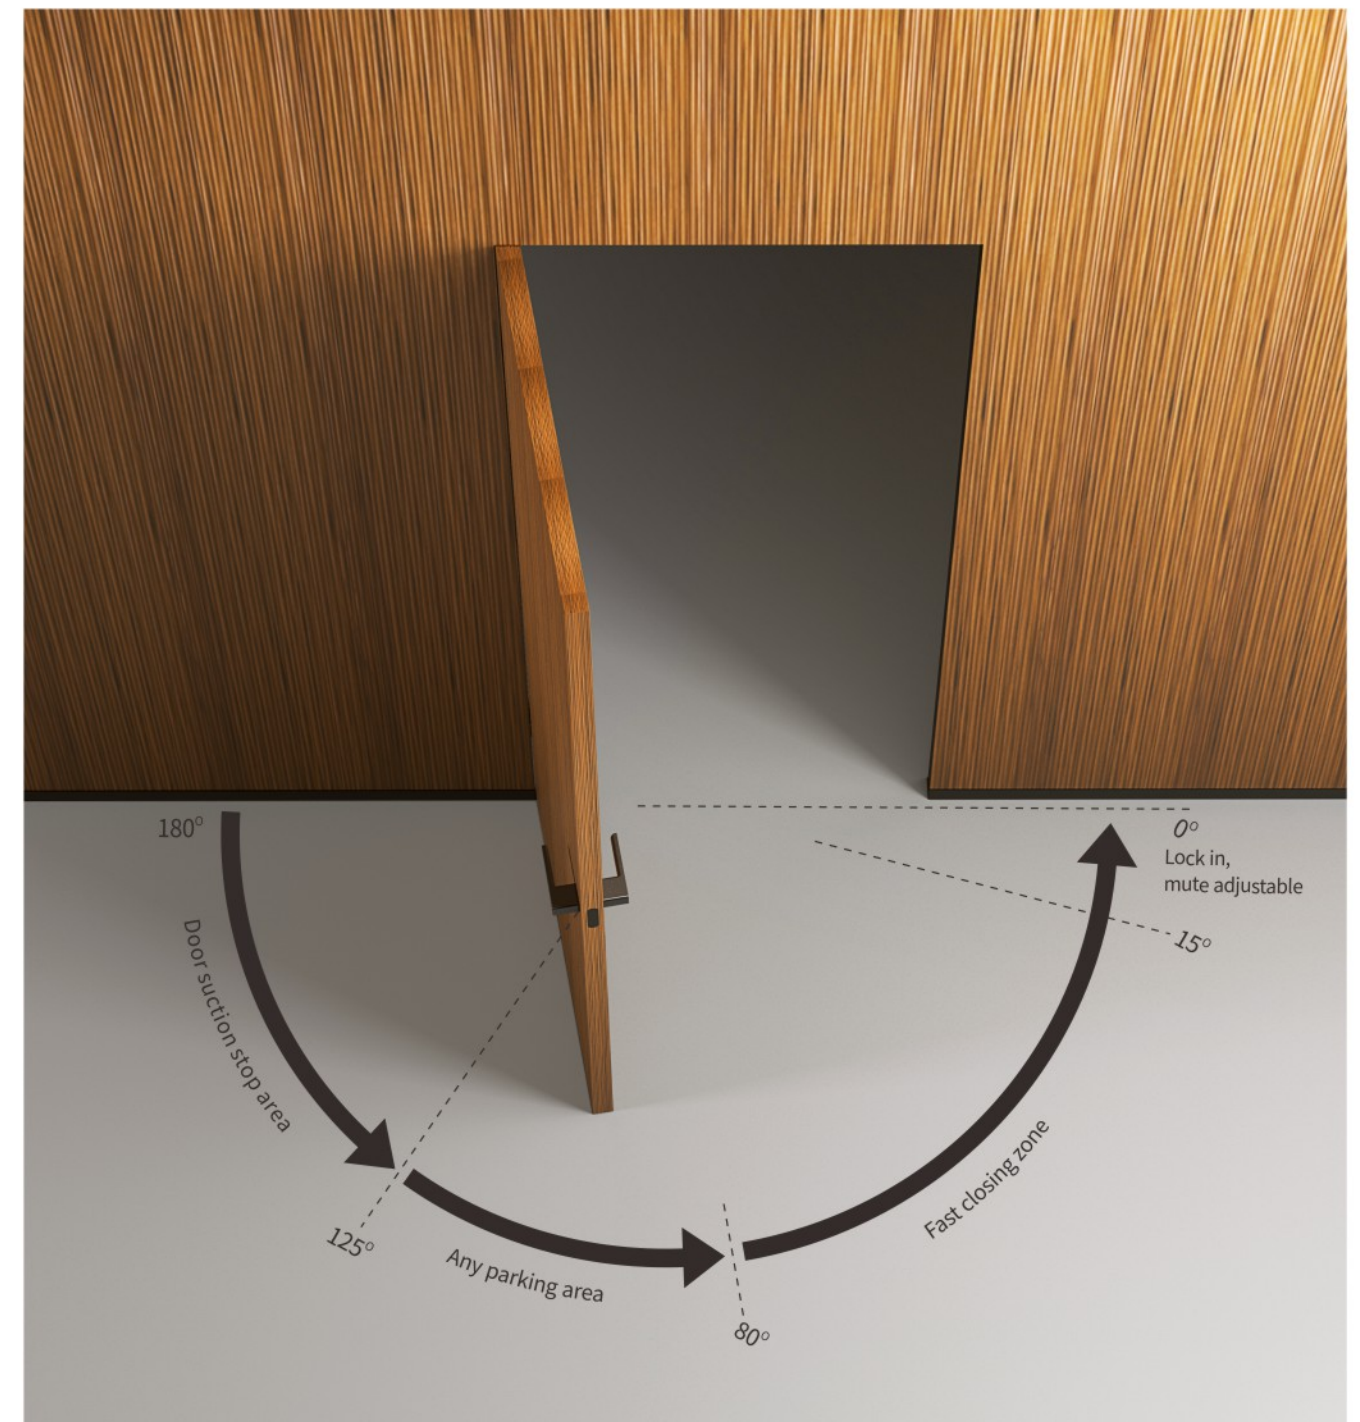

Create angular, very three-dimensional visual aesthetics, enhance the overall sense of seniority and value of the product; the use of lines, with a richer sense of hierarchy, and then through the use of large areas of woodwork and leather, the softness and angularity of the very good fusion together. It can be used for both small homes and high-ceilinged villa spaces.

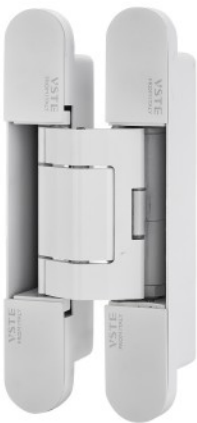

白色/PC



金拉丝/SB




黑镍/BN




亚黑/HC

3D adjustment Hidden Hydraulic Hinge (round)

Body material	Zinc alloy
Two-dimensional tunable	Left and right $\pm 2.0\text{mm}$, up and down $\pm 2.5\text{mm}$
Maximum opening Angle	180°
Fixed stop door	85° - 125° Free stop door
Single closed door force	6N.m.
Applicable temperature range	-5°C - 45°C
Service life	$\geq 200,000$ times

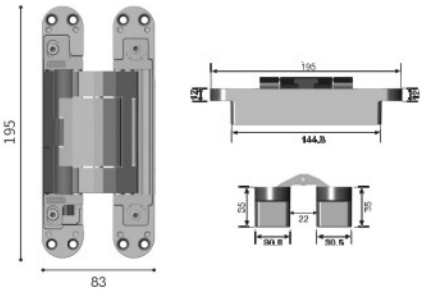

Functional diagram

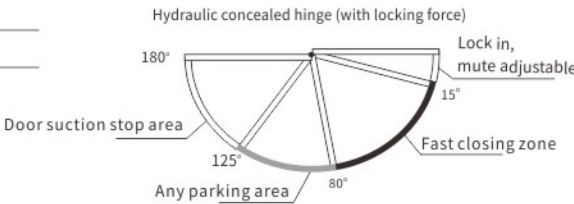

白色/PC



金拉丝/SB




黑镍/BN



亚黑/HC

3D adjustment Hidden Hydraulic Hinge (square)

Body material	Zinc alloy
Two-dimensional tunable	Left and right $\pm 2.0\text{mm}$, up and down $\pm 2.5\text{mm}$
Maximum opening Angle	180°
Fixed stop door	85° - 125° Free stop door
Single closed door force	6N.m.
Applicable temperature range	-5°C - 45°C
Service life	$\geq 200,000$ times

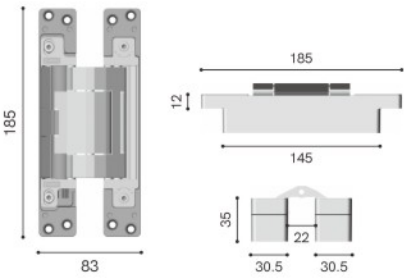

Hinge configuration	load-bearing	Door dimension
2 hydraulic	60kg	Door thickness $\geq 42\text{mm}$ Door height $\leq 2000\text{mm}$ Door width $\leq 800\text{mm}$
1 load bearing 2 hydraulic	80kg	Door thickness $\geq 45\text{mm}$ Door height $\leq 2200\text{mm}$ Door width $\leq 900\text{mm}$
3 hydraulic	100kg	Door thickness $\geq 50\text{mm}$ Door height $\leq 2400\text{mm}$ Door width $\leq 950\text{mm}$



卡其米/KQM



金拉丝/SB




黑镍/BN



亚黑/HC

HE3D165(30)
3D adjustment hidden hinge 80KG

Body material	Zinc alloy
Maximum gate weight	80KG(2 PCS)
Door thickness	36-55mm
Door size	Width less than 900mm, height less than 2100mm
With 3D adjustable	vertical ± 2.5 mm horizontal ± 2.5 mm depth ± 1.0 mm

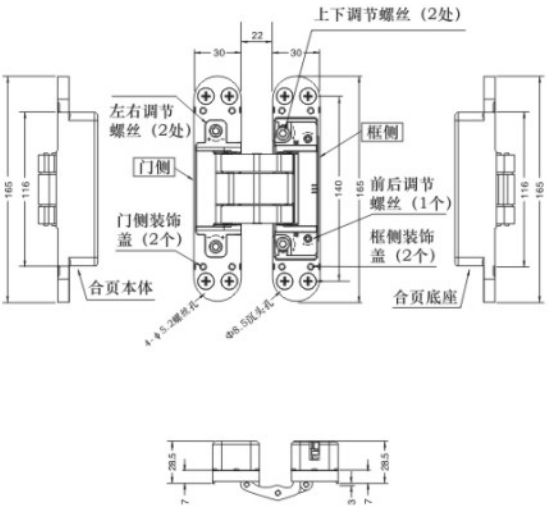



卡其米/KQM



金拉丝/SB




黑镍/BN






亚黑/HC

HE3D140(29)
3D adjustment hidden hinge 60KG

Body material	Zinc alloy
Maximum gate weight	60KG(2 PCS)
Door thickness	36-55mm
Door size	Width less than 900mm, height less than 2100mm
With 3D adjustable	vertical ± 2.5 mm horizontal ± 2.5 mm depth ± 1.0 mm

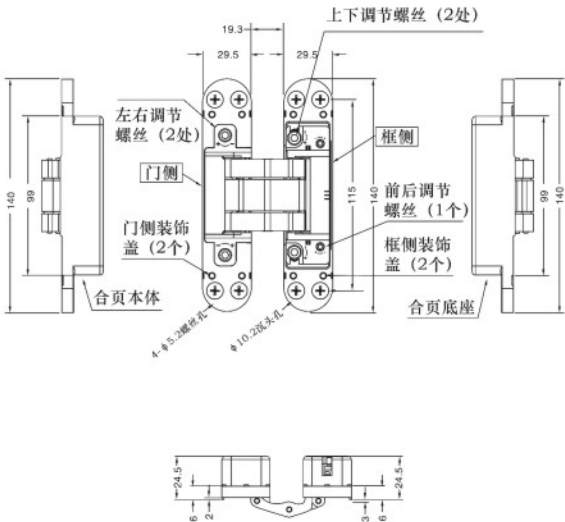

HE45(14) hinge

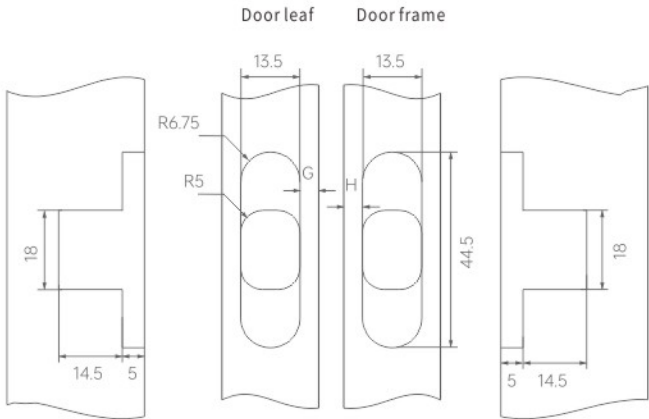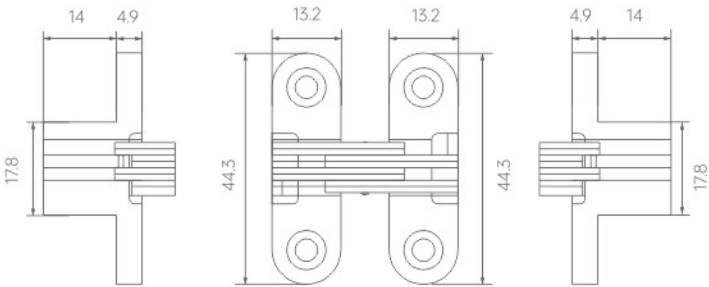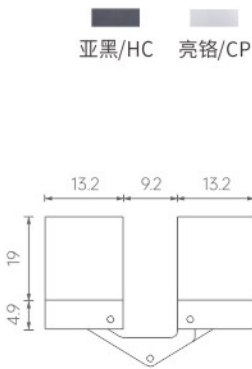

PRODUCT INFORMATION

- For Cabinets, wardrobes
- Concealed installation
- Easy to install and adjust
- Opening angle: 180°
- It does not have 3D adjustment function


TECHNICAL DATA

- Max. door weight with 2 hinges 7kg
- Max. door weight with 3 hinges 11kg
- Min. door thickness 18mm
- Max. door width 450mm
- Max. door high 700mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: stainless steel

HE3D70(14) 3D adjustable hinge

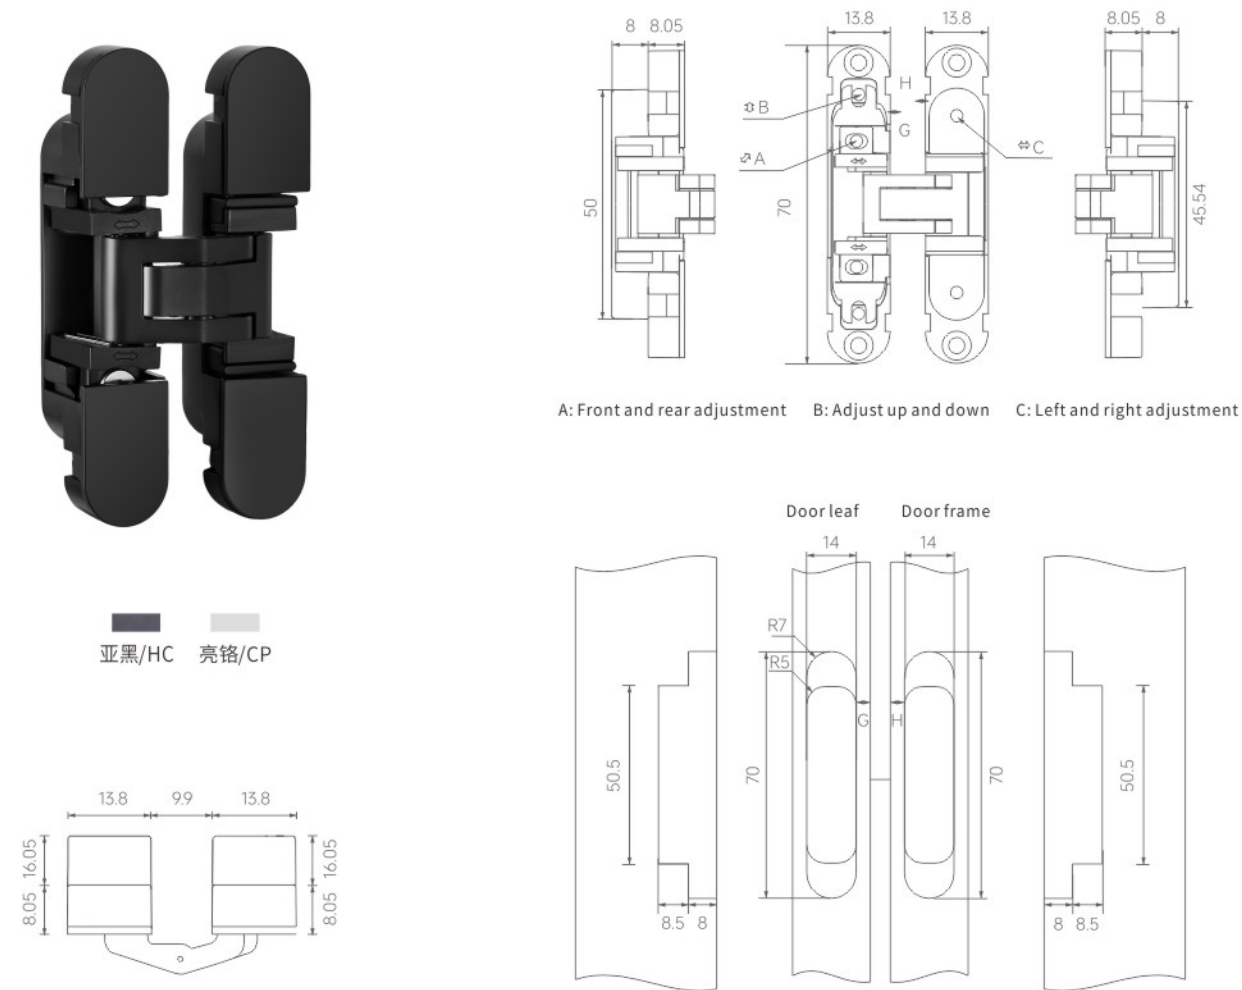

PRODUCT INFORMATION

- For Cabinets, wardrobes
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical ± 2 mm
 - horizontal ± 2 mm
 - depth ± 1.5 mm
- Opening angle: 180°


TECHNICAL DATA

- Max. door weight with 2 hinges 9kg
- Max. door weight with 3 hinges 12kg
- Min. door thickness 20mm
- Max. door width 600mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS

HE3D90(18) 3D adjustable hinge

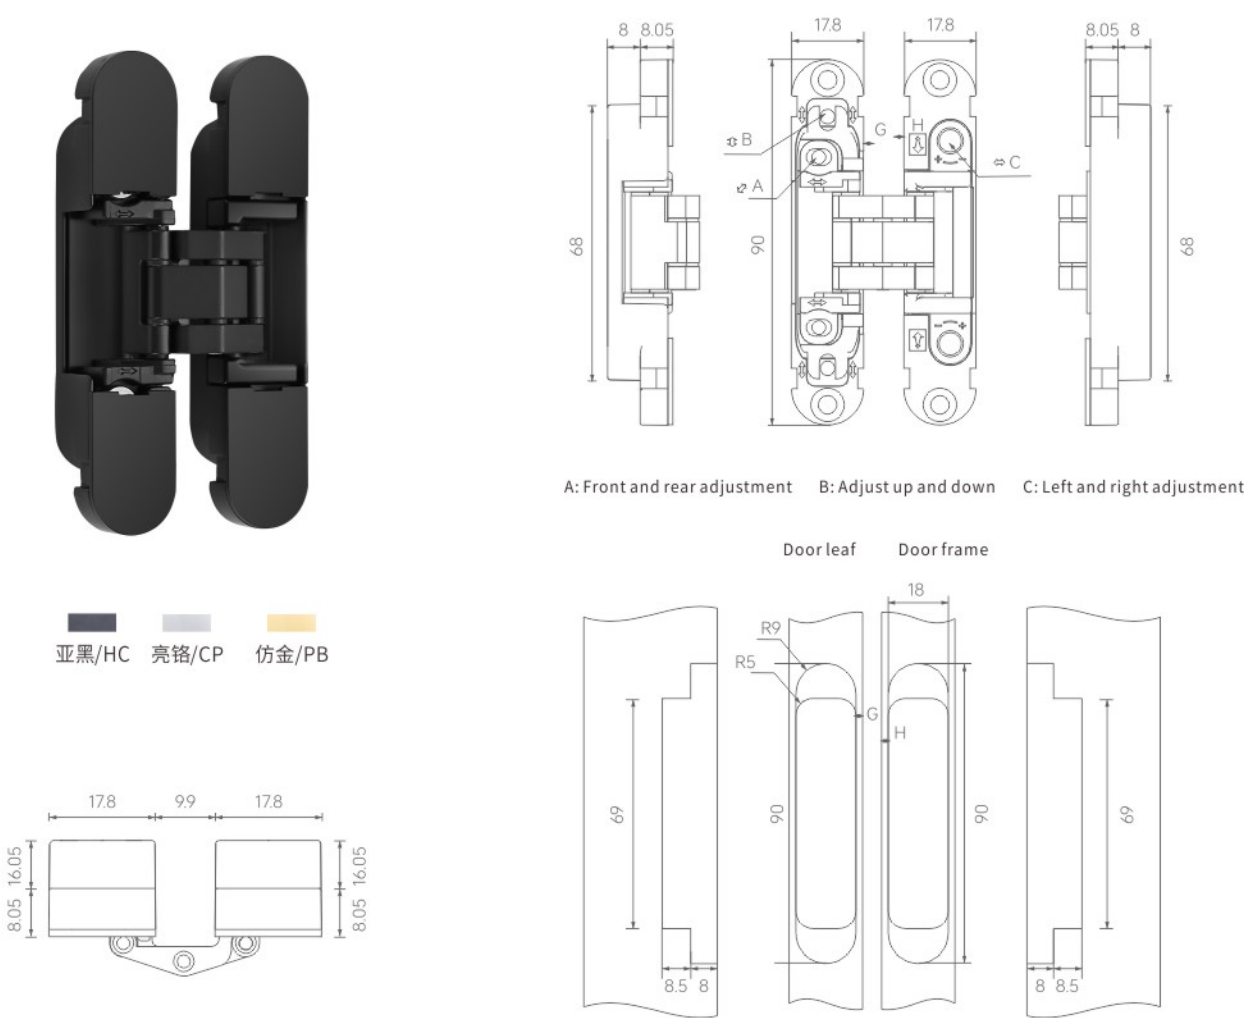

PRODUCT INFORMATION

- For wooden doors, glass door
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical ± 2 mm
 - horizontal ± 2 mm
 - depth ± 1.5 mm
- Opening angle: 180°

TECHNICAL DATA

- Max. door weight with 2 hinges 12kg
- Max. door weight with 3 hinges 16kg
- Min. door thickness 22-25mm
- Max. door width 600mm
- Max. door high 1500mm




MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS

HE3D90 3D glass adjustable hinge



 亚黑/HC
 亮铬/CP
 仿金/PB

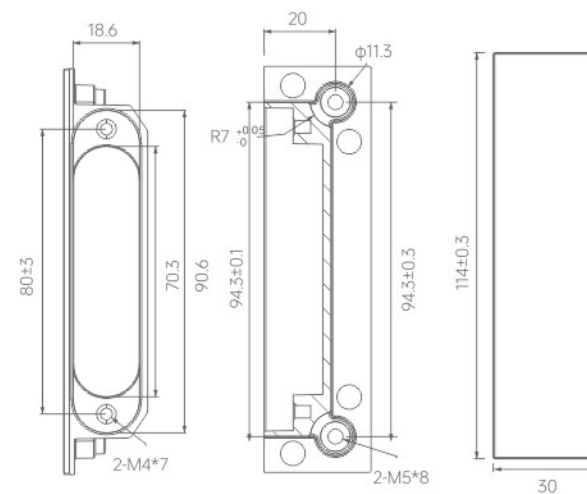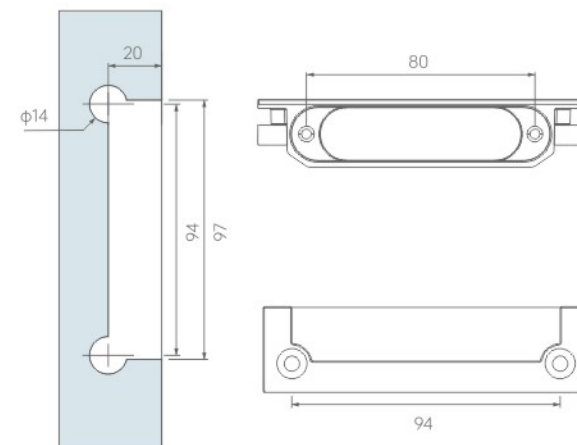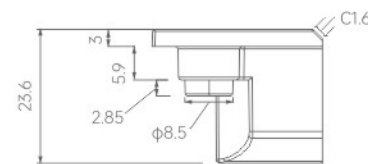

PRODUCT INFORMATION

- For wooden doors, glass door
- Concealed installation
- Easy to install and adjust


TECHNICAL DATA

- Min. door thickness 40mm



MATERIALS

- Body material: zinc alloy

HE3D110(30) 3D adjustable hinge

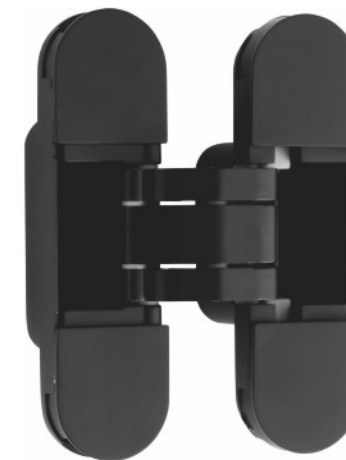


 亚黑/HC
 黑镍/BN
 金拉丝/SB

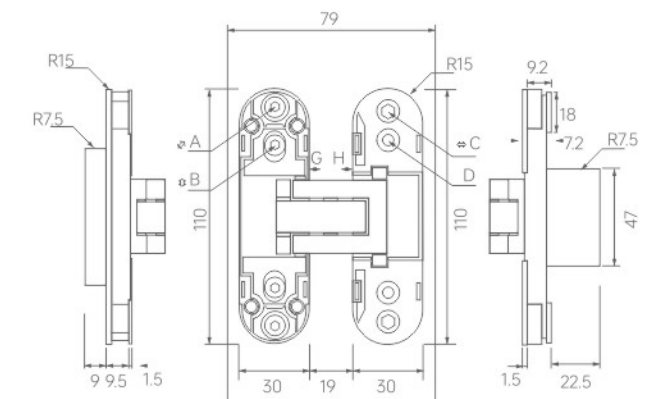

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment

Door frame Door leaf

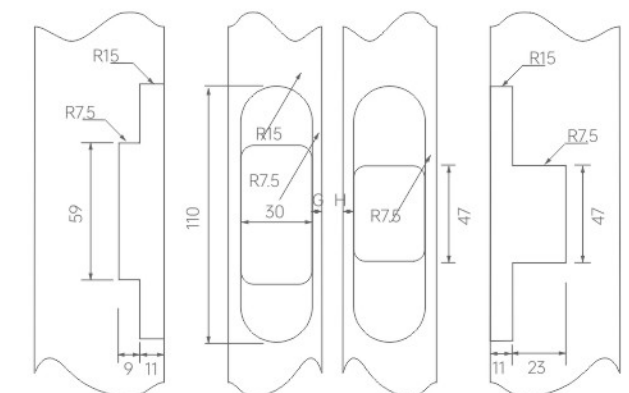

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2\text{mm}$
 - horizontal $\pm 2\text{mm}$
 - depth $\pm 1.5\text{mm}$
- Opening angle: 180°


TECHNICAL DATA

- Max. door weight with 2 hinges 40kg
- Max. door weight with 3 hinges 60kg
- Min. door thickness 40mm
- Max. door width 940mm



MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS/zinc alloy


HE3D110(25) 3D adjustable hinge

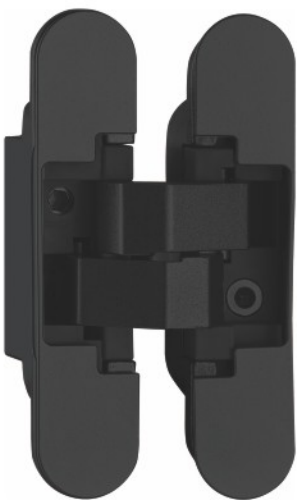

■ 亚黑/HC

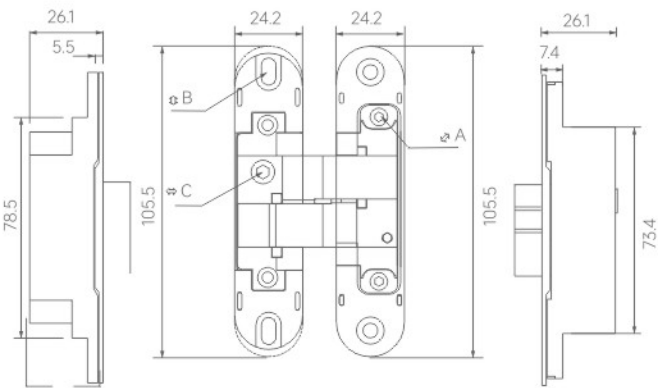

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment

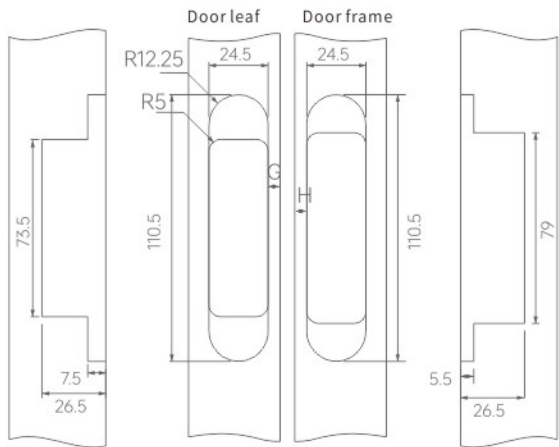

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2.4\text{mm}$
 - horizontal $\pm 1.5\text{mm}$
 - depth $\pm 0.8\text{mm}$
- Opening angle: 180°

TECHNICAL DATA

- Max. door weight with 2 hinges 45kg
- Max. door weight with 3 hinges 70kg
- Min. door thickness 26mm
- Max. door width 850mm



MATERIALS

- Body material: zinc alloy
- Connecting arm material: POM
- Cover material: ABS


HE3D115(23) 3D adjustable hinge



■ 亚黑/HC ■ 亮铬/CP ■ 金拉丝/SB

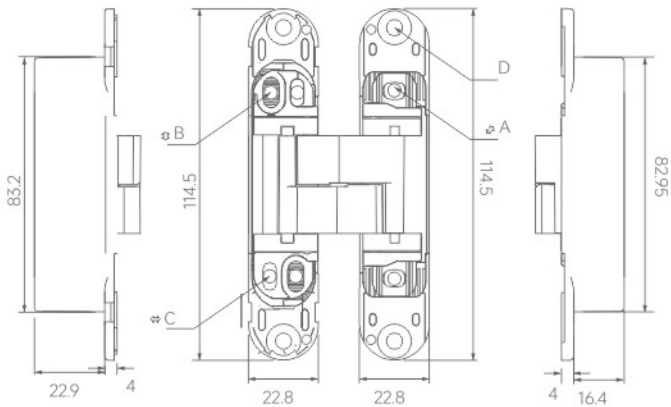

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment

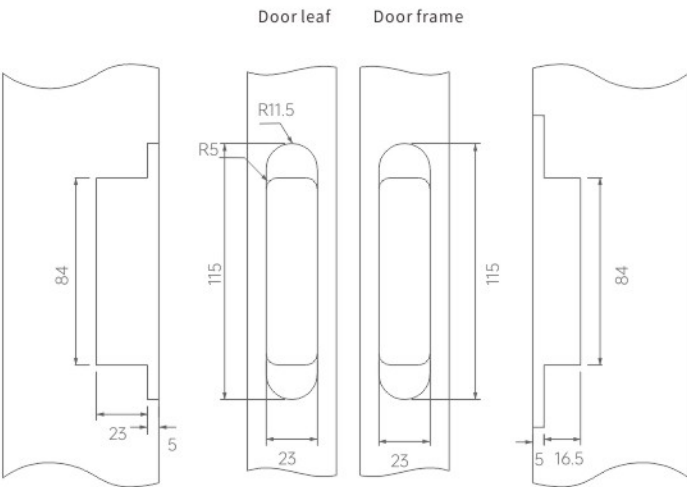

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2\text{mm}$
 - horizontal $\pm 2\text{mm}$
 - depth $\pm 1.5\text{mm}$
- Opening angle: 180°


TECHNICAL DATA

- Max. door weight with 2 hinges 45kg
- Max. door weight with 3 hinges 70kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS

HE3D120(30) 3D adjustable hinge

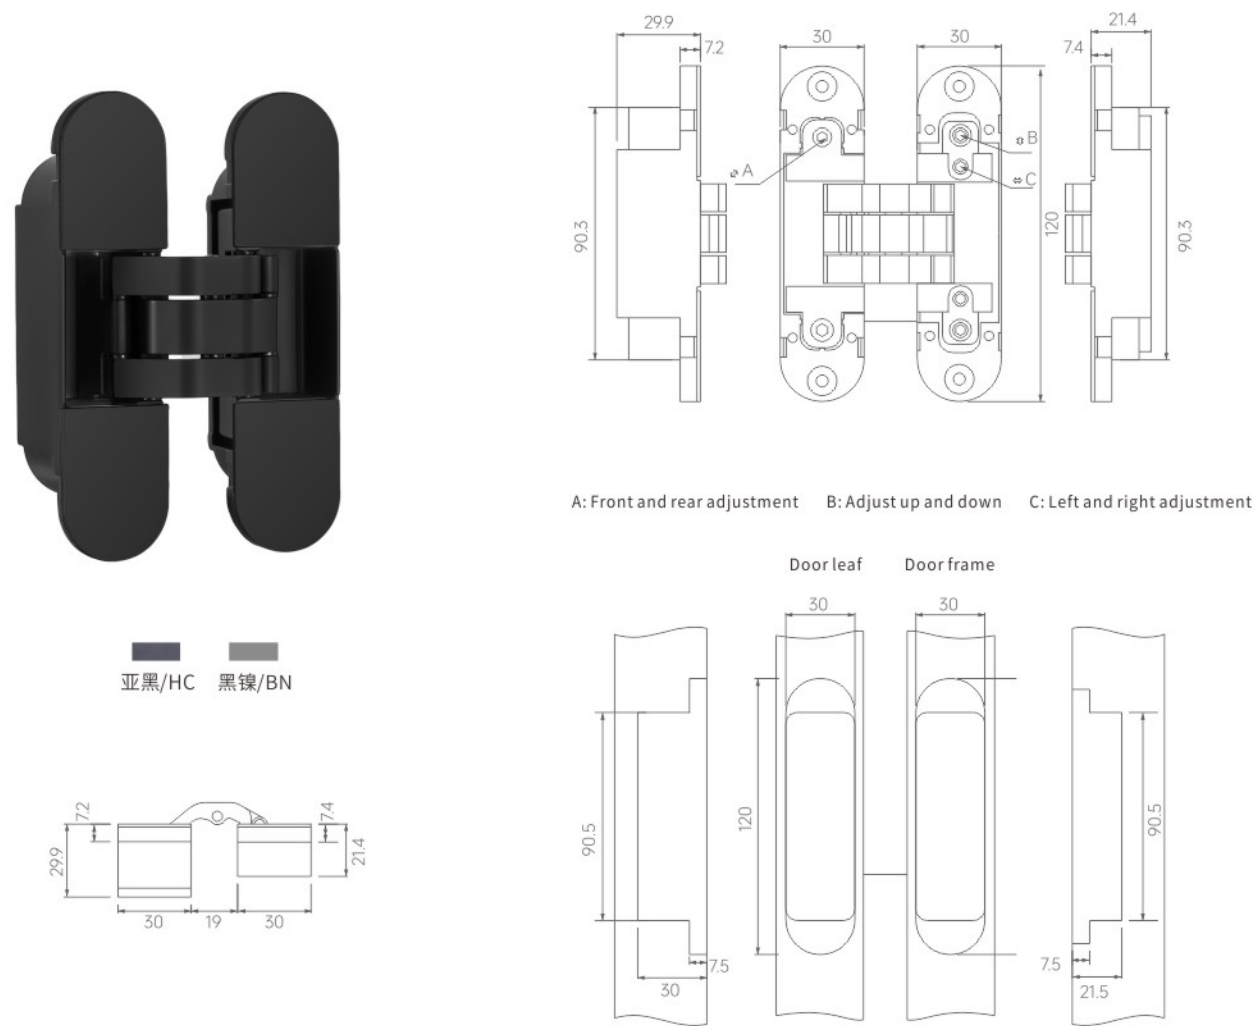

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment


Door leaf Door frame

HE3D130(32) 3D adjustable hinge





亚黑/HC 黑镍/BN 黄古铜/HKF

SP=40mm				SP=44mm			
C	F	G	T	C	F	G	T
8	4	4	8.3	8	6	6	10.3
9	4	4	7.3	9	6	6	9.3
10	4	4	6.3	10	6	6	8.3
11	4	4	5.3	11	6	6	7.3
12	4	4	4.3	12	6	6	6.3

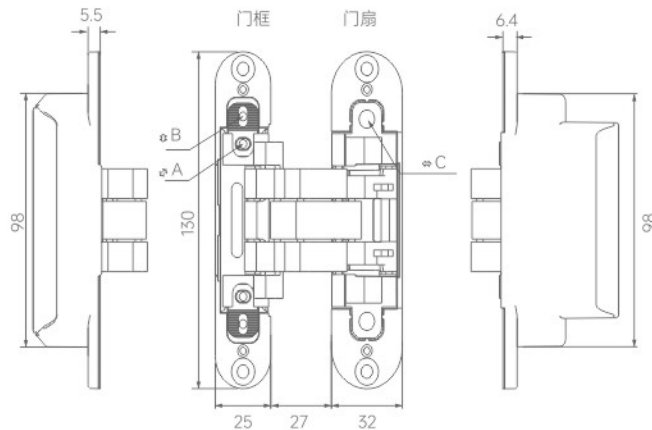

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment

Door leaf Door frame

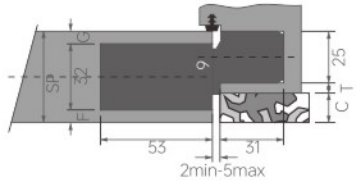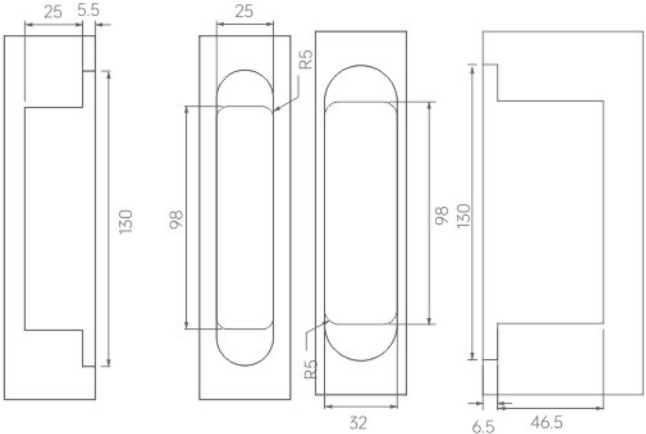

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2\text{mm}$
 - horizontal $\pm 2\text{mm}$
 - depth $\pm 1.5\text{mm}$
- Opening angle: 180°

TECHNICAL DATA

- Max. door weight with 2 hinges 40kg
- Max. door weight with 3 hinges 60kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2\text{mm}$
 - horizontal $\pm 2\text{mm}$
 - depth $\pm 1.5\text{mm}$
- Opening angle: 180°

TECHNICAL DATA



- Max. door weight with 2 hinges 80kg
- Max. door weight with 3 hinges 120kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS/zinc alloy

HE3D130(23) 3D adjustable hinge


HE3D135(28) 3D adjustable hinge

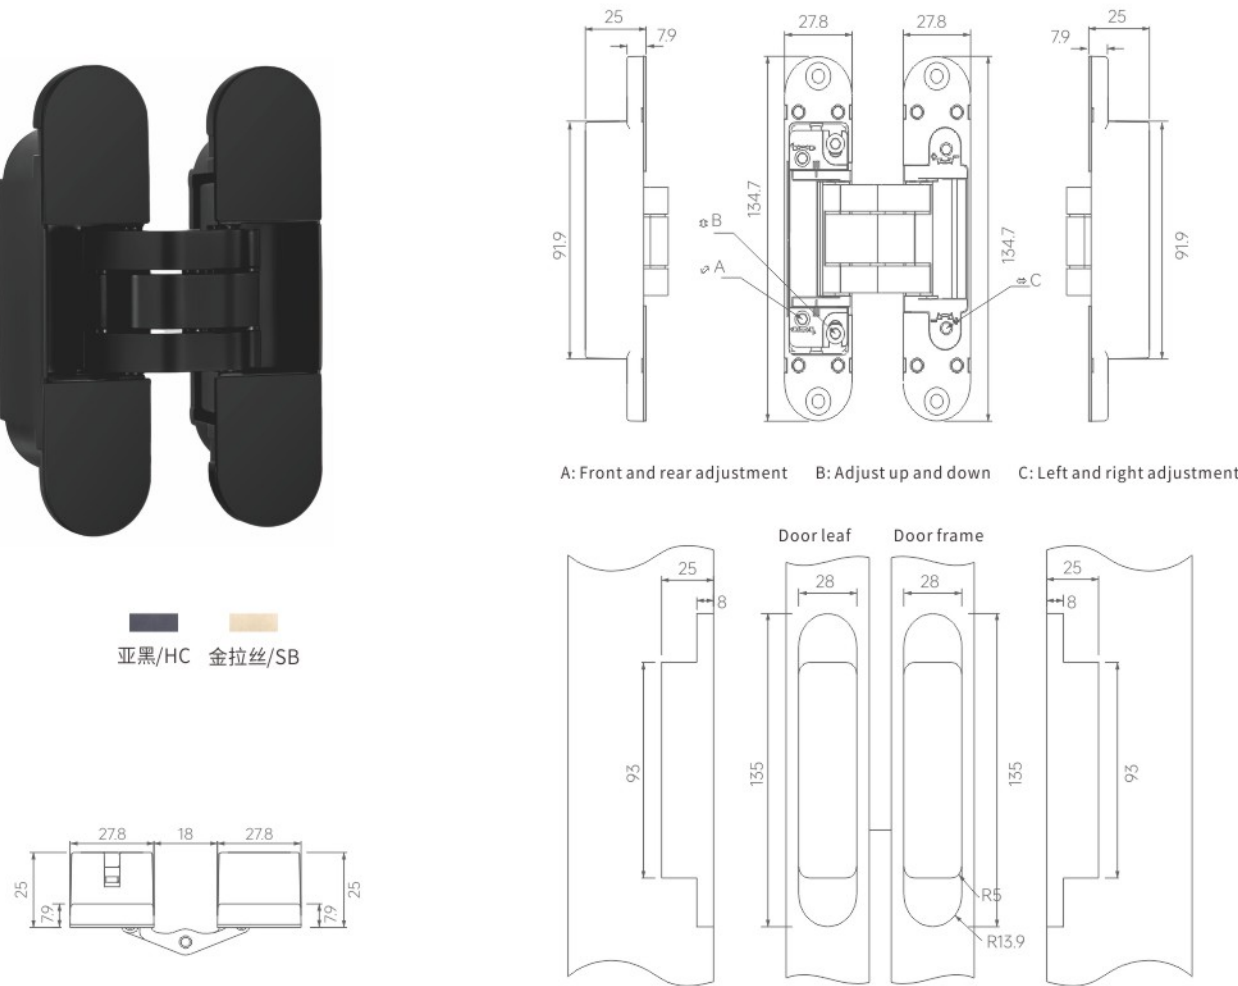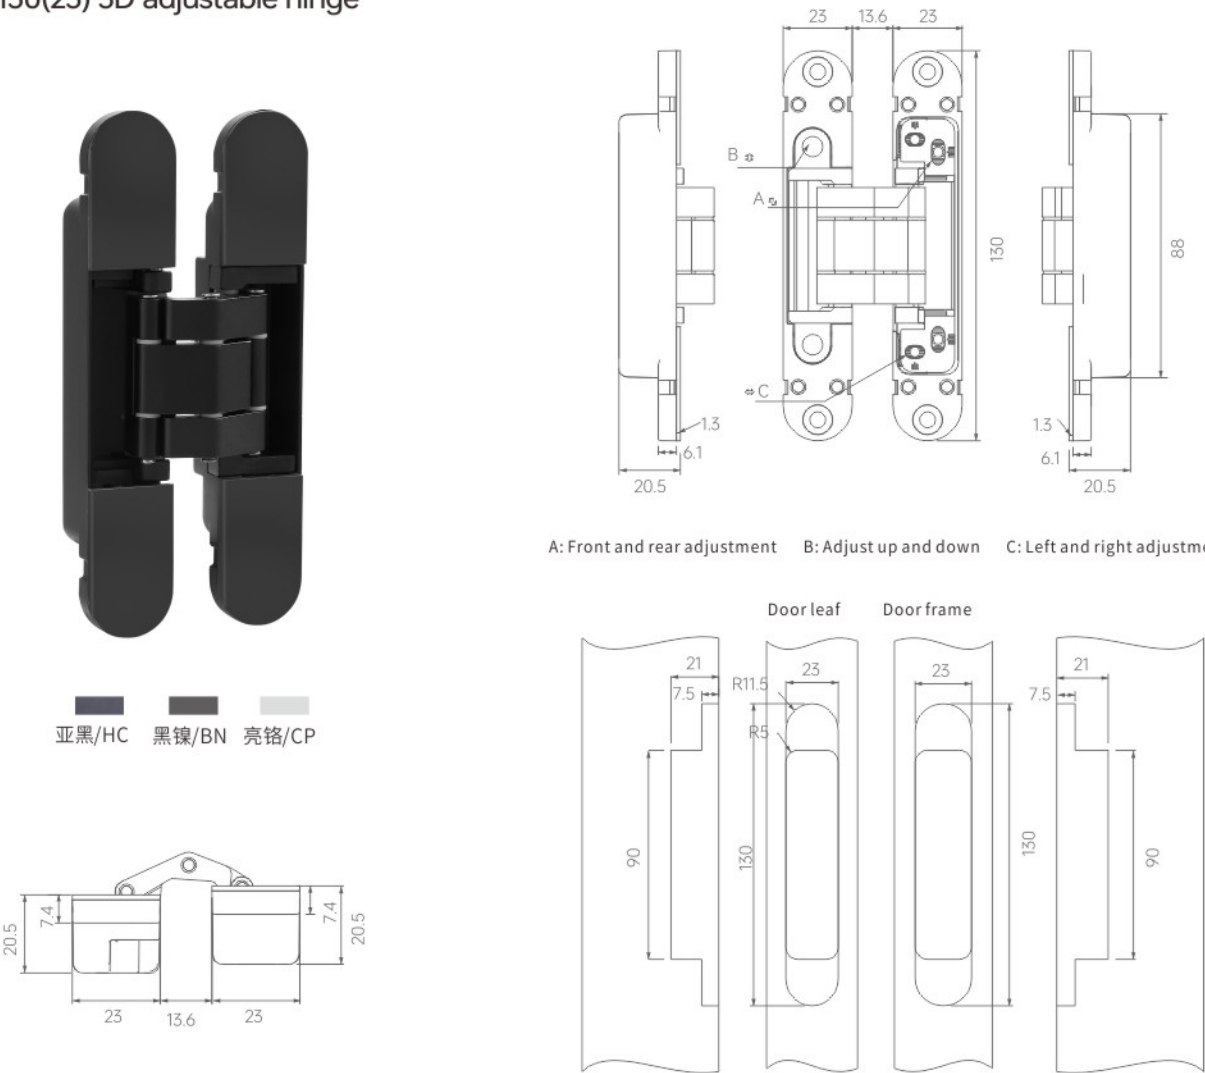

PRODUCT INFORMATION	TECHNICAL DATA
- For wooden doors - Concealed installation - Easy to install and adjust - With 3D adjustable - vertical ± 2mm - horizontal ± 2mm - depth ± 1mm - Opening angle: 180°	- Max. door weight with 2 hinges40kg - Max. door weight with 3 hinges60kg - Min. door thickness40mm - Max. door width940mm
	MATERIALS
	- Body material: zinc alloy - Connecting arm material: zinc alloyAluminium alloy - Cover material: ABS

PRODUCT INFORMATION	TECHNICAL DATA
- For wooden doors - Concealed installation - Easy to install and adjust - With 3D adjustable - vertical ± 2mm - horizontal ± 2mm - depth ± 1.5mm - Opening angle: 180°	- Max. door weight with 2 hinges60kg - Max. door weight with 3 hinges90kg - Min. door thickness38mm - Max. door width900mm
	MATERIALS
	- Body material: zinc alloy - Connecting arm material: zinc alloy - Cover material: ABS

HE3D140(30) 3D adjustable hinge

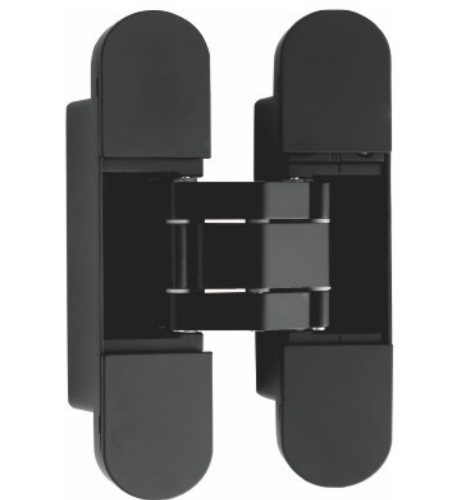

- 亚黑/HC



白色/PC

黑镍/BN


黄古/HKF
- 金拉丝/SB

亮光青古/AB

镀金/PVD

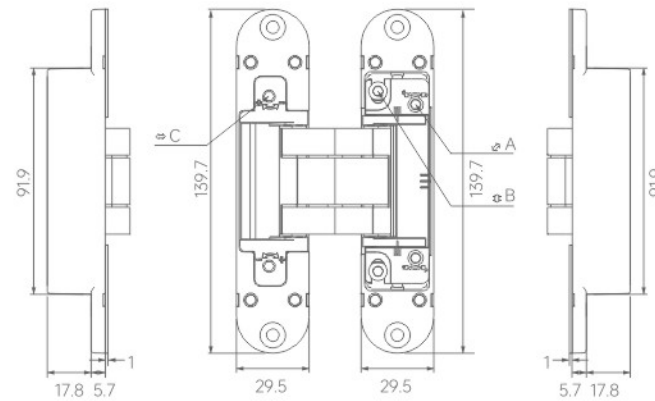

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment

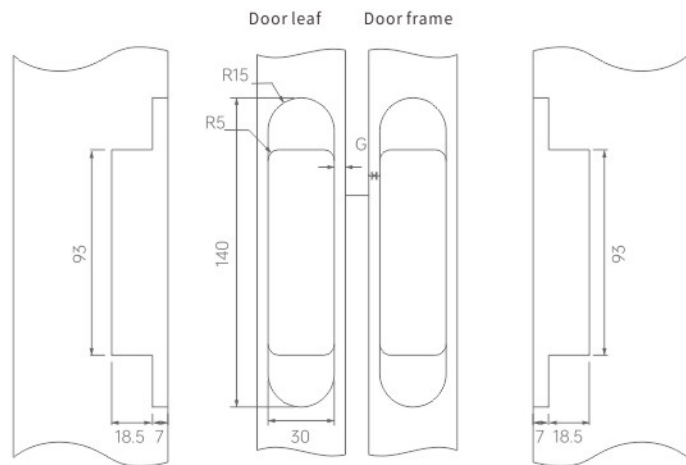

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical ± 2mm
 - horizontal ± 2mm
 - depth ± 1.5mm
- Opening angle: 180°

TECHNICAL DATA

- Max. door weight with 2 hinges 60kg
- Max. door weight with 3 hinges 90kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS



- Body material: zinc alloy
- Connecting arm material: zinc alloy
Aluminium alloy
- Cover material: ABS\zinc alloy

HE3D150(25) 3D adjustable hinge




- 亚黑/HC

亮铬/CP

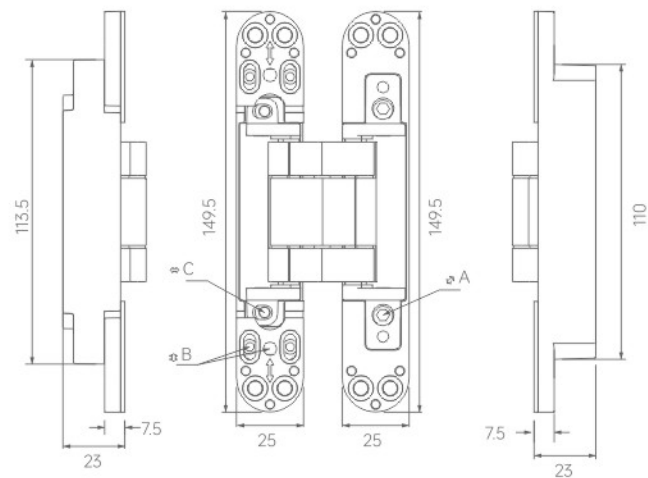

A: Front and rear adjustment B: Adjust up and down C: Left and right adjustment

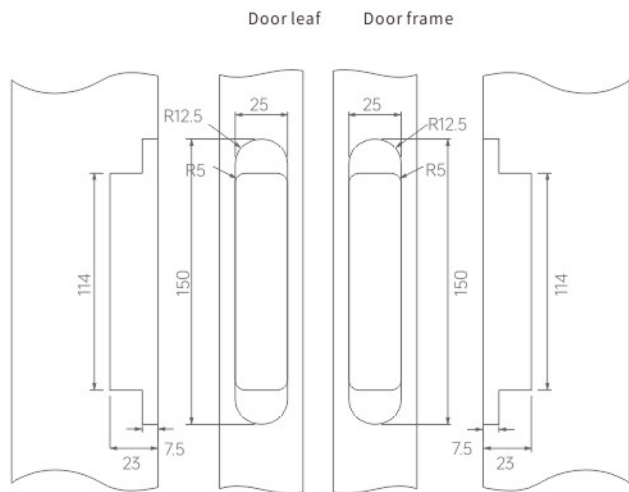

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical ± 2mm
 - horizontal ± 2mm
 - depth ± 1.5mm
- Opening angle: 180°



TECHNICAL DATA

- Max. door weight with 2 hinges 60kg
- Max. door weight with 3 hinges 90kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: Aluminium alloy
- Cover material: ABS

3D150(30) 3D adjustable hinge

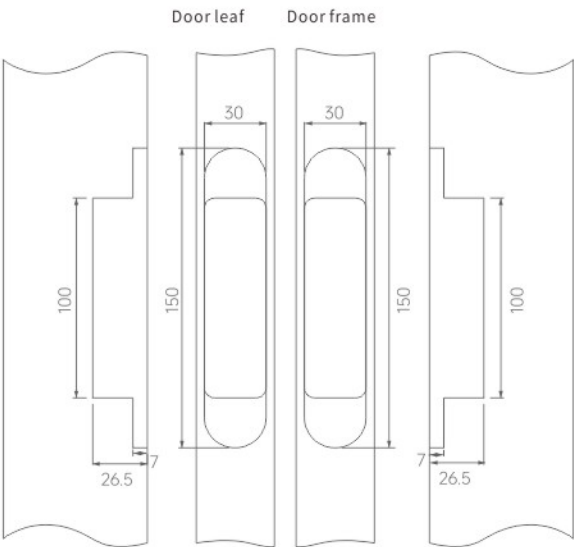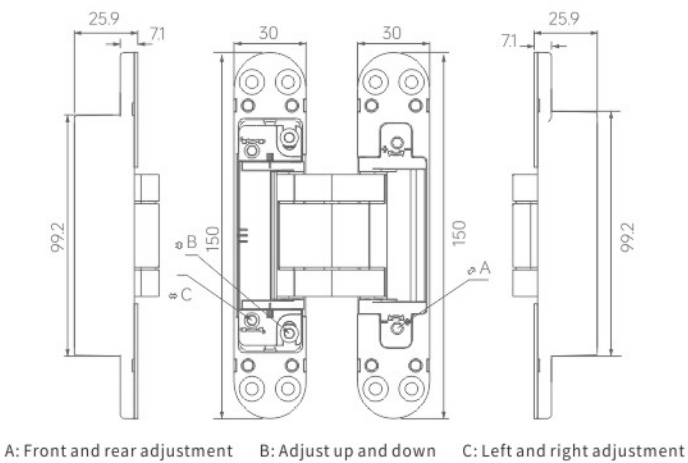

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical ± 2 mm
 - horizontal ± 2 mm
 - depth ± 1.5 mm
- Opening angle: 180°



TECHNICAL DATA

- Max. door weight with 2 hinges 80kg
- Max. door weight with 3 hinges 120kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: zinc alloy

HE3D155(21) 3D adjustable hinge

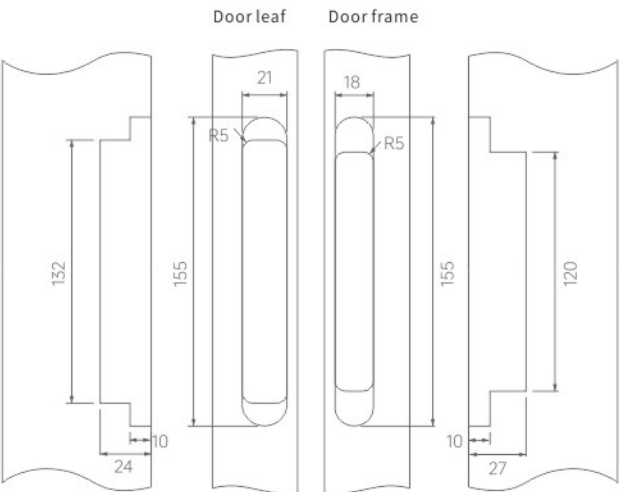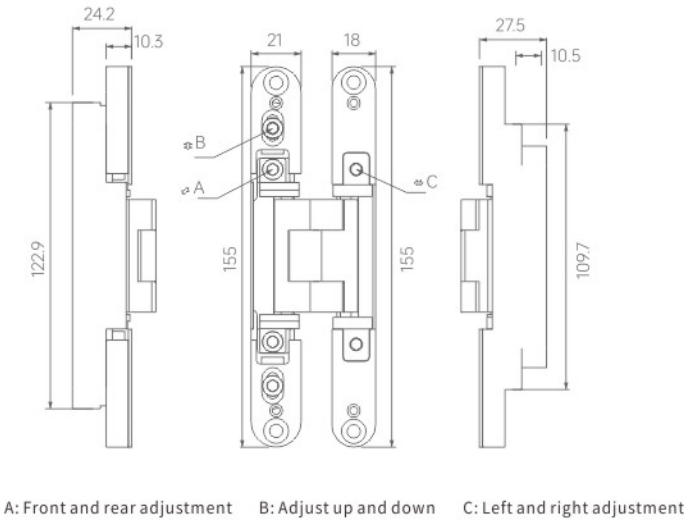

备注：方向识别 关门状态下

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical ± 3 mm
 - horizontal ± 3 mm
 - depth ± 1.5 mm
- Opening angle: 180°


TECHNICAL DATA

- Max. door weight with 2 hinges 40kg
- Max. door weight with 3 hinges 60kg
- Min. door thickness 25mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: zinc alloy

HE3D160(28) 3D adjustable hinge

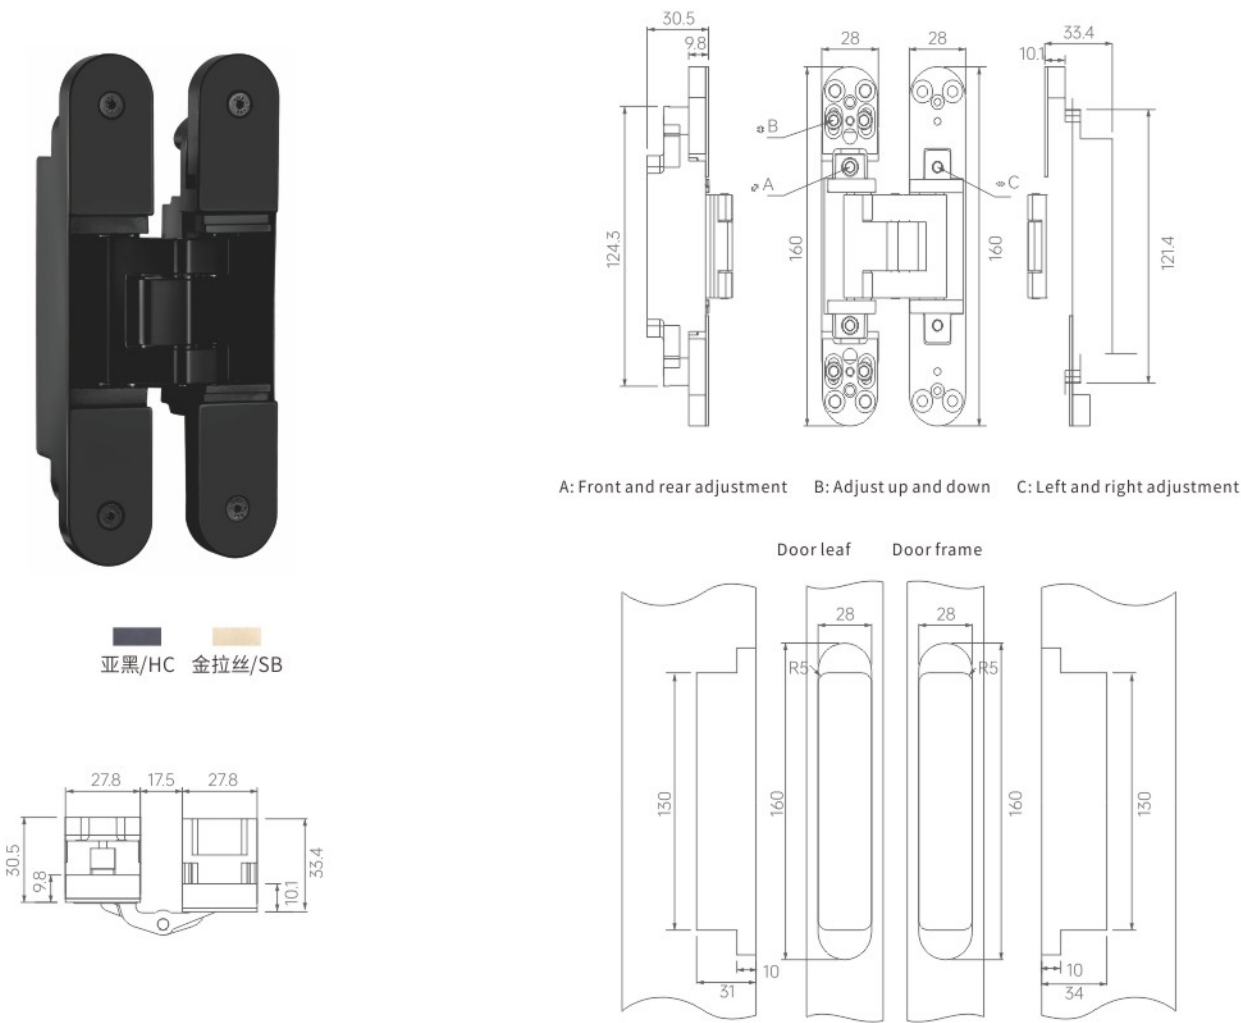

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2\text{mm}$
 - horizontal $\pm 2\text{mm}$
 - depth $\pm 1.5\text{mm}$
- Opening angle: 180°


TECHNICAL DATA

- Max. door weight with 2 hinges 80kg
- Max. door weight with 3 hinges 120kg
- Min. door thickness 40mm
- Max. door width 940mm

MATERIALS

- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: zinc alloy

HE3D165(30) 3D adjustable hinge

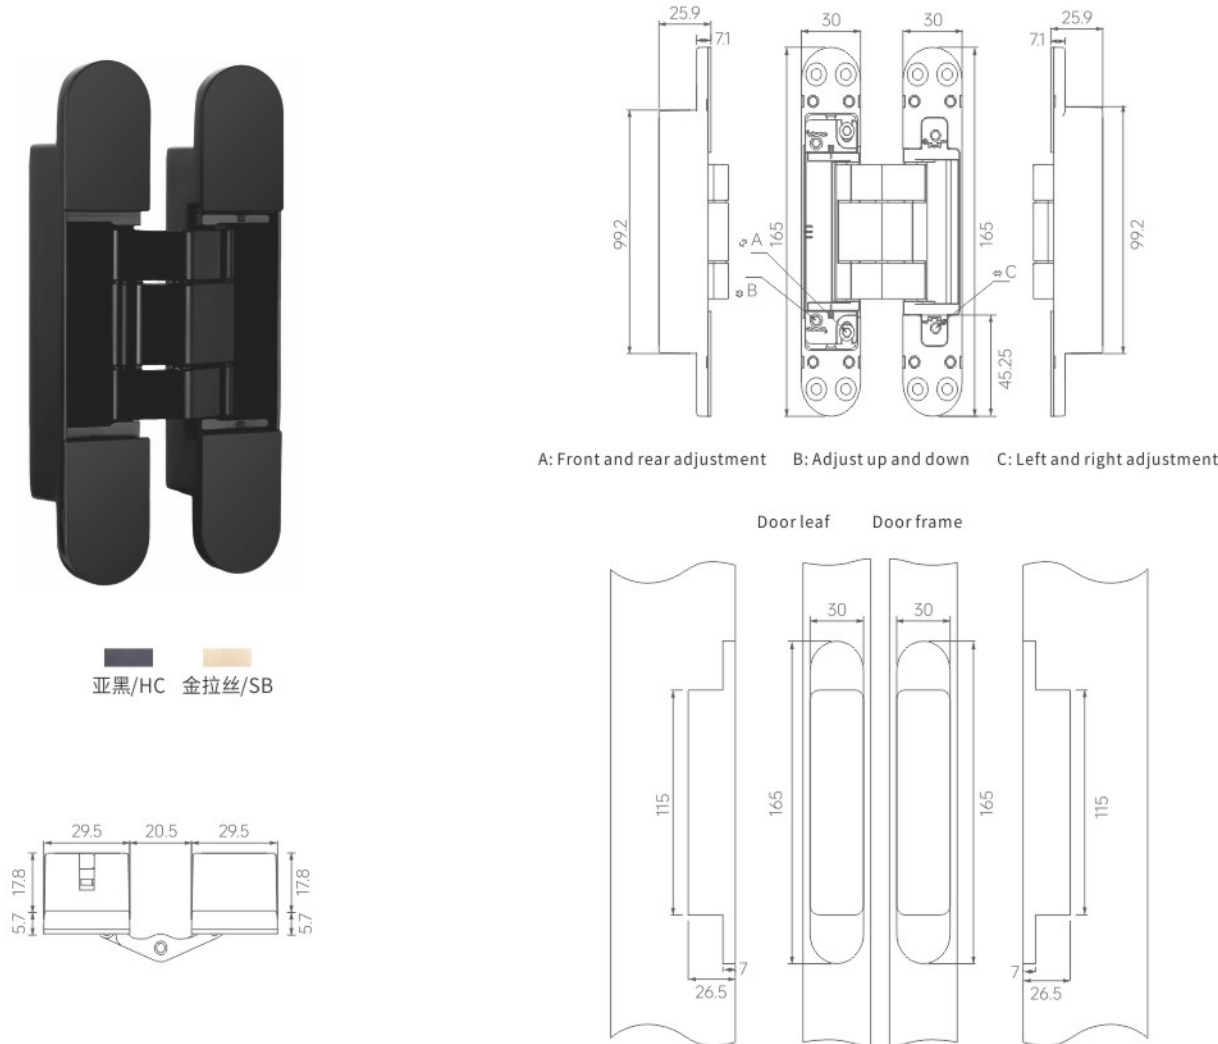

PRODUCT INFORMATION

- For wooden doors
- Concealed installation
- Easy to install and adjust
- With 3D adjustable
 - vertical $\pm 2\text{mm}$
 - horizontal $\pm 2\text{mm}$
 - depth $\pm 1.5\text{mm}$
- Opening angle: 180°

TECHNICAL DATA


- Max. door weight with 2 hinges 80kg
- Max. door weight with 3 hinges 120kg
- Min. door thickness 40mm
- Max. door width 940mm
- Max. door high 2286mm

MATERIALS


- Body material: zinc alloy
- Connecting arm material: zinc alloy
- Cover material: ABS\zinc alloy

HE3D200(30) 3D adjustable hinge

HE2D130(31) 2D adjustable hinge

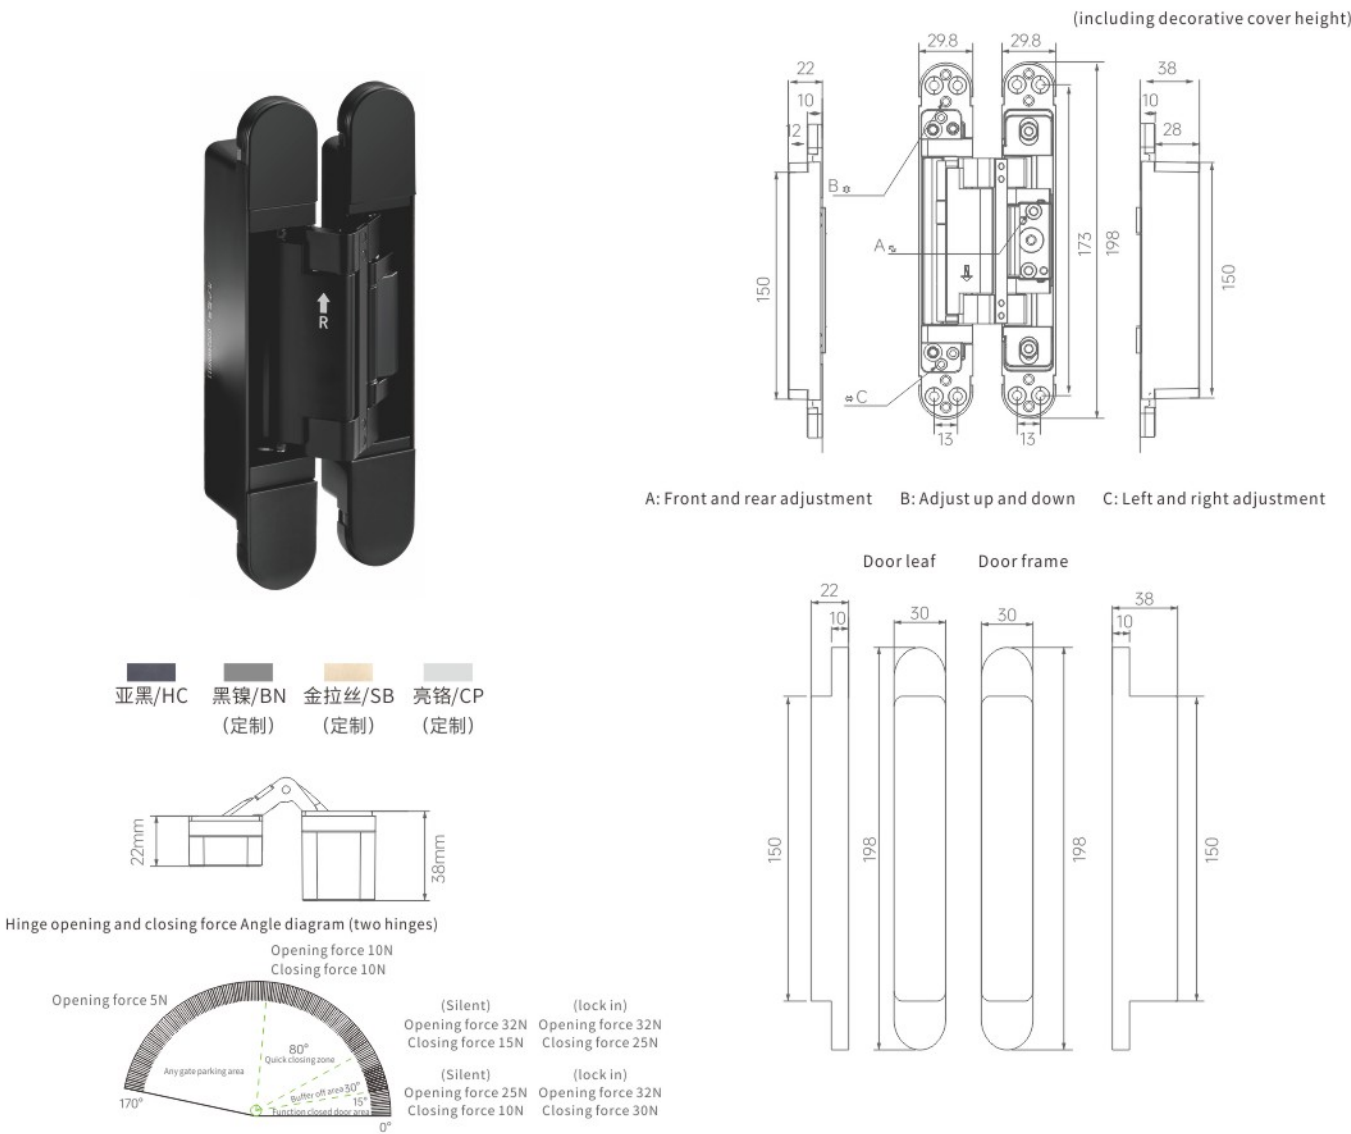

PRODUCT INFORMATION	TECHNICAL DATA
- For wooden doors - Concealed installation - Easy to install and adjust - With 3D adjustable - vertical ± 2.5mm - horizontal ± 2mm - depth ± 1.5mm - Opening angle: 170° - Hinge left and right	- Max. door weight with 2 hinges 80kg - Max. door weight with 3 hinges 100kg - Min. door thickness 40mm - Max. door width 1100mm - Max. door high 2600mm
	MATERIALS - Body material: zinc alloy - Connecting arm material: stainless steel - Cover material: ABS

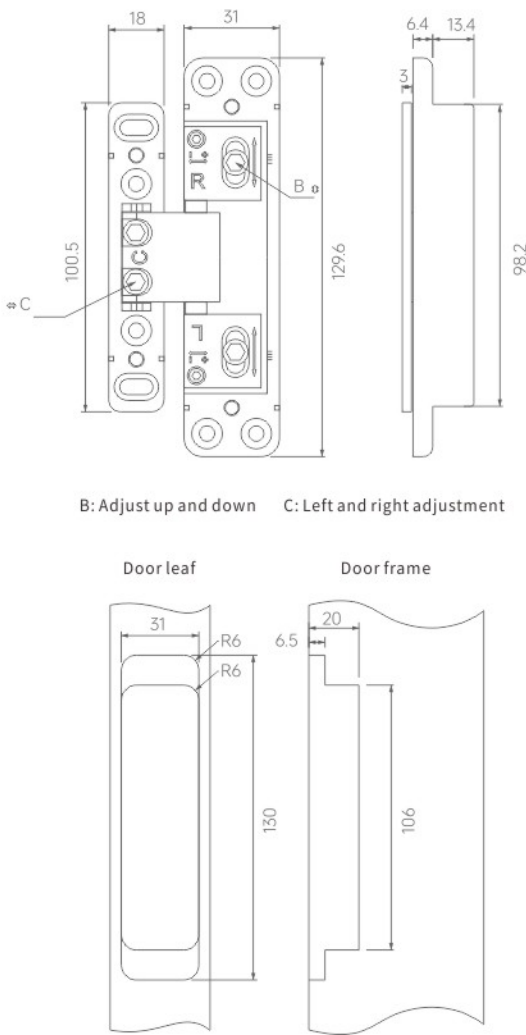

PRODUCT INFORMATION	TECHNICAL DATA
- For wooden doors - Concealed installation - Easy to install and adjust - With 2D adjustable - vertical ± 2mm - horizontal ± 2mm - Opening angle: 110° - Left and right	- Max. door weight with 2 hinges 80kg - Min. door thickness 35mm - Max. door width 940mm
	MATERIALS - Body material: stainless steel - Connecting arm material: stainless steel - Cover material: iron

USA CLUTCH OUTSIDE TRIM LOCK



ENTRY LEVER

STOREROOM LEVER

PASSAGE LEVER

DUMMY LEVER

FEATURE

Model:006P

Zinc Alloy material Round Panel:78mm

SC Brass Cylinder and 3 SC Brass Keys

US26D Finish

Max Door thickness:55mm,Clutch Function

FEATURE

Model: 006S


SUS304 material

Round Panel:78mm

SC Brass Cylinder and 3 SC Brass Keys

US26D Finish

Max Door thickness:55mm,Clutch Function

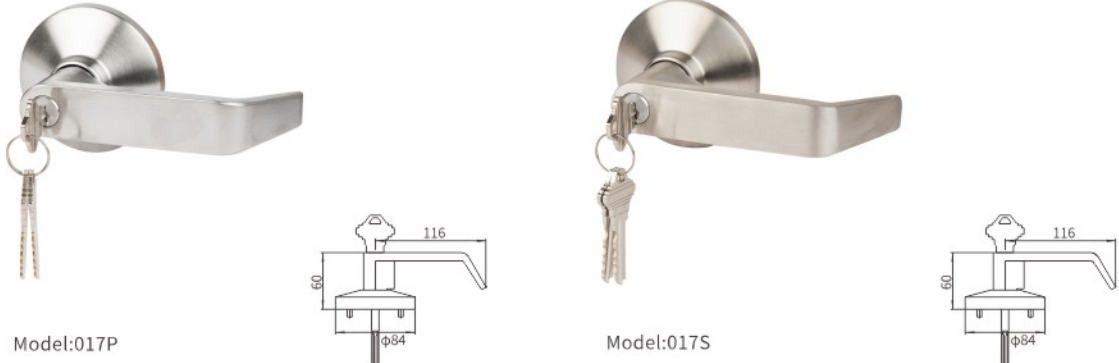

Model:017P

Zinc alloy

shine chrome finish

round panel 84mm

brass cylinder and 3 brass keys

door thickness 45-55mm

Model:017S

Sus304 material


round panel 84mm

brass cylinder and 3 brass keys

SS finish

door thickness 45-55mm

TOUCH BAR FIRE RATED BULKY RIM TYPE 211 SERIES

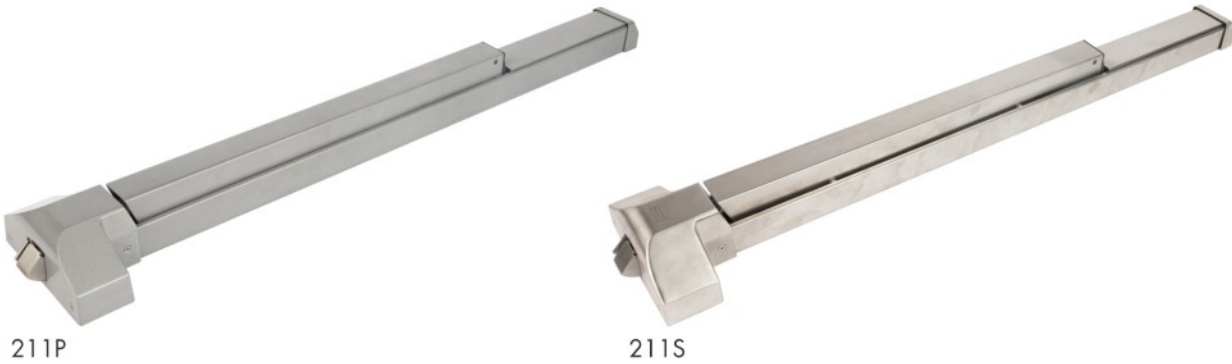

211P

211S

211S

Sus304 material,Bulky type, 845mm length,500mm touch bar, sus304 bolt and security bolt,sus304 striker, sus304 end cap

211P

Metal Powder Coating painted, Bulky type,845mm length,500mm touch bar, sus304 bolt and security bolt, sus304 striker, metal end cap

SPECIFICATION

Model	211P	211S
Material	Alu Cover, metal bar	Sus304 Cover, Sus304 Bar
Bolt	Sus304	Sus304
End Cap	Metal	Sus304
Striker	Zinc Alloy	Sus304

OPTIONAL FULL TOUCH BAR



ACCESSORIES



211S Sus304 End Cap



211P Metal End Cap



211 Screws



211 Sus304 Striker

095

096

TOUCH BAR FIRE RATED BULKY VERTICAL TYPE 216 SERIES





216P



216S

216S
Vertical type, sus304 material, 845mm length, 500mm touch bar, 900mm upper and lower tube, max door height 2160mm, sus304 upper bolt and sus304 upper striker, Sus304 double door striker, sus304 end cap

216P
Vertical Bulky type, metal Powder Coating painted, 845mm length, 500mm touch bar, 900mm upper and lower tube, max door height 2160mm, sus304 upper bolt and sus304 upper striker, Sus304 double door striker, metal end cap

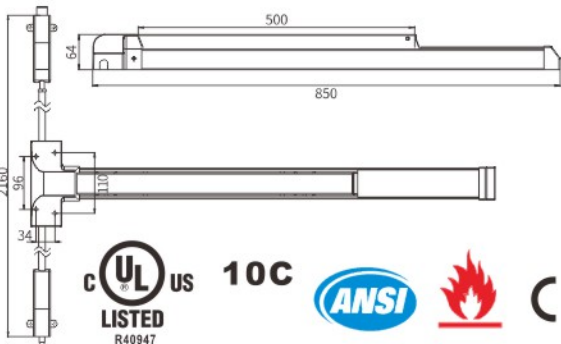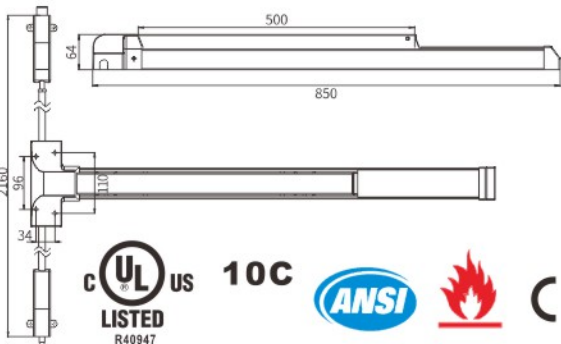




SPECIFICATION

Model	216P	216S
Material	Alu Cover, metal bar	Sus304 Cover, Sus304 Bar
Upper and Lower body	Metal	Nickel Metal
Upper bolt	Sus304	Sus304
End Cap	Metal	Sus304
Upper Striker	Sus304	Sus304

OPTIONAL FULL TOUCH BAR

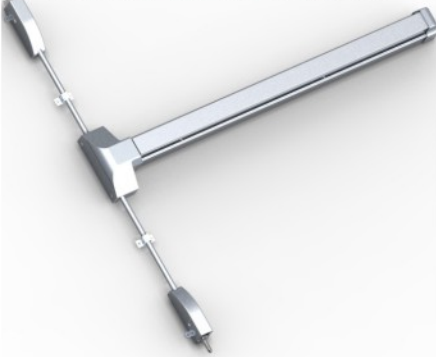

ACCESSORIES



216S Sus304 End Cap



216P Metal End Cap



216 Sus304 Striker



216 Sus304 Upper Striker



216 Screws








latching speed adjusted valve

closing speed adjusted valve

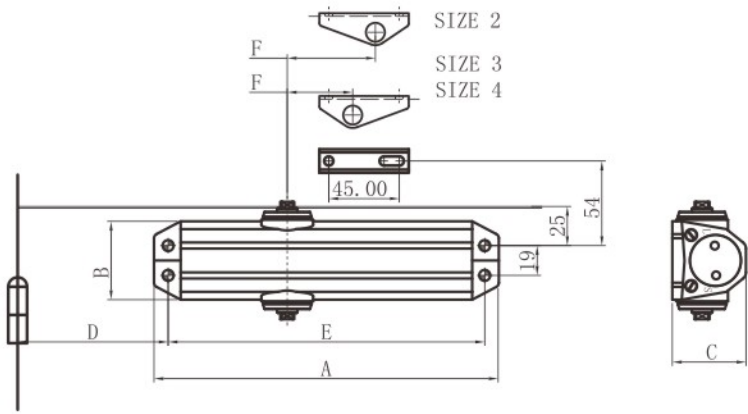

SIZE 2



SIZE 3

SIZE 4


Main parameter											
Item	Closer Size	Overall dimension			Installation dimension			Applicable door weight(kg)	Applicable door width(mm)	Function	Please install according to the instruction
		A	B	C	D	E	F				
D3023AW	3#	220	50	47	96	202	59	≤60	≤950	Closing/latching speed adjustable Backcheck adjustable (EN2/3/4 by template)	
D3023BW	3#	220	50	47	96	202	59	≤60	≤950	Closing/latching speed adjustable Backcheck adjustable (EN2/3/4 by template)	

097

098

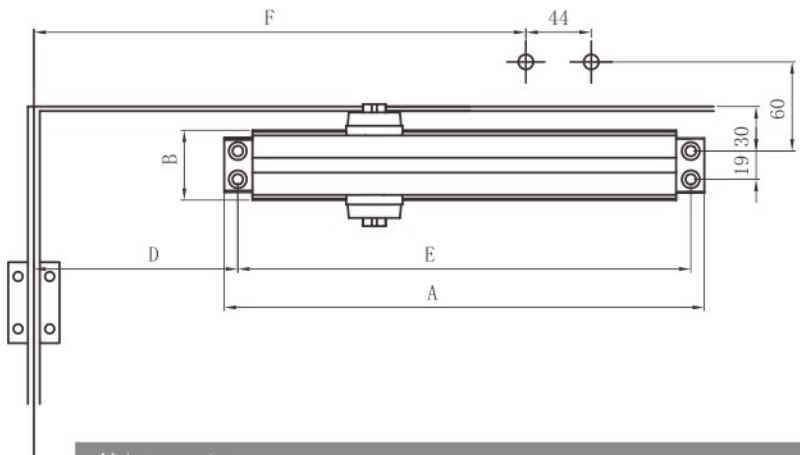
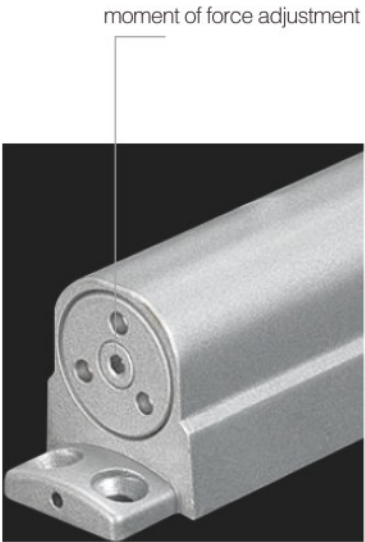


Main parameter												
Item	Closer Size	Overall dimension			Installation dimension			Applicable door weight(kg)	Applicable door width(mm)	Maximun opening angle	Function	Please install according to the instruction
		A	B	C	D	E	F					
301-6BW	1#-6#	323	47	52	191	305	331	≤150	≤1500	100°	Closing/latching speed adjustable Backcheck Spring power adjustable	
301-6BW	1#-6#	323	47	52	152	305	292	≤150	≤1500	130°	Closing/latching speed adjustable Backcheck Spring power adjustable	
301-6BW	1#-6#	323	47	52	114	305	254	≤150	≤1500	180°	Closing/latching speed adjustable Backcheck Spring power adjustable	

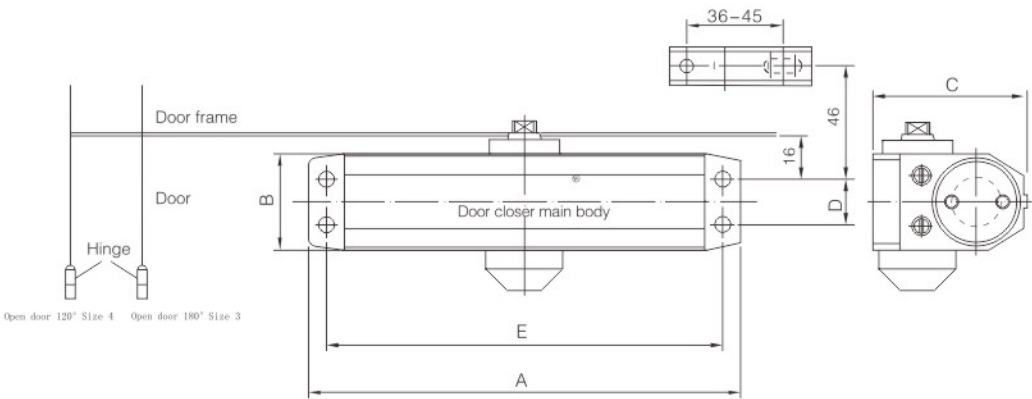

Main parameter									
Item	Overall dimension			Installation dimension		Applicable door weight(kg)	Applicable door width(mm)	Function	Please install according to the instruction
	A	B	C	D	E				
601-6BW	248	44.5	70	19	230	15~150	≤1500	Latching/closing adjustable Backcheck Spring power adjustable	Power adjustable by spring

DOOR CLOSER

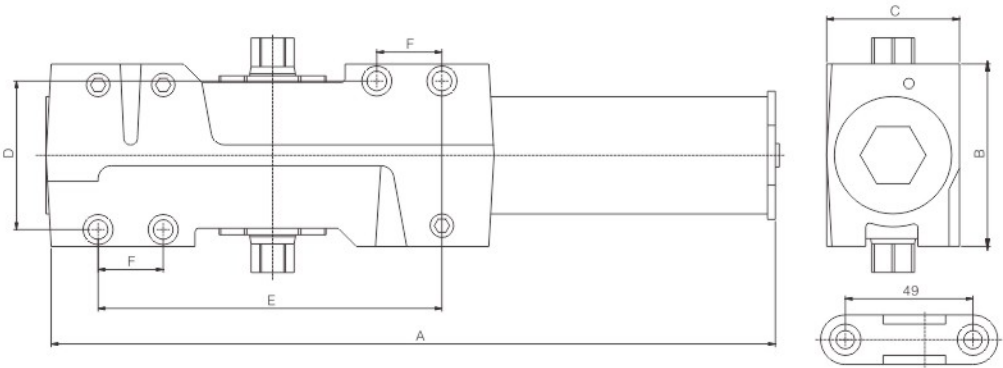

Main parameter										
Item	Overall dimension			Installation dimension			Applicable door weight(kg)	Applicable door width(mm)	Function	Please install according to the instruction
	A	B	C	D	E	F				
DC1-6	280	70	51	57	127	25.5	15~150	≤ 1500	Latching/closing adjustable Backcheck adjustable	Power adjustable by spring